

KEY FEATURES

- Next generation high performance 1" (25,4 mm) exit compression driver
- Deplocex® Patent Pending Technology for improved thermal dissipation, low power compression losses and high power handling
- 1,75" (44,4 mm) Copper Clad Aluminum voice coil with Kapton former
- 160 W program power above 1,4 kHz
- Sensitivity: 109 dB (1W / 1m)
- Exclusive High Temperature Polymer dome and surround design optimized with F.E.M for linear and extended response with minimized resonances
- Copper shorting cap for reduced distortion, linear inductance and increased output
- F.E.M. optimized ceramic magnetic circuit
- Aluminium cover



TECHNICAL SPECIFICATIONS

Throat diameter	25,4 mm	1 in
Rated impedance		8 Ω
Minimum impedance		6,1 Ω
D.C. resistance		4,1 Ω
Power capacity¹	80 W _{AES} above 1,4 kHz	
Program power²	160 W above 1,4 kHz	
Sensitivity³	109 dB	1W / 1m @ Z _N coupled to TD-164


Frequency range		0,8 - 20 kHz
Recommended crossover		1,4 kHz or higher (12 dB/oct min.)
Voice coil diameter	44,4 mm	1,75 in
Flux density		1,6 T
BI factor		5,4 N/A

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.

² Program power is defined as the transducer's ability to handle normal music program material.

³ Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 2 - 7 kHz

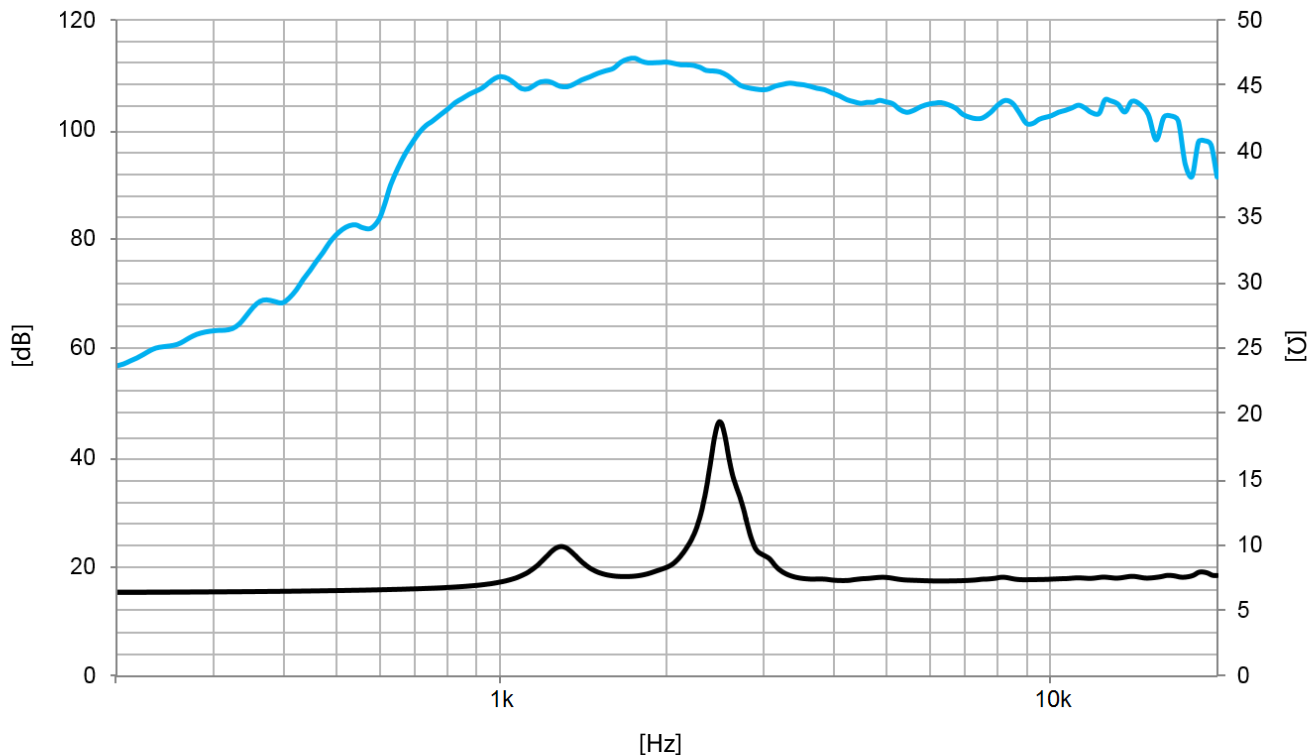

Note: On axis frequency response measured coupled to TD-164 horn in anechoic chamber, 1W / 1m

MOUNTING INFORMATION

Overall diameter	120 mm	4,72 in
Depth	59 mm	2,32 in
Mounting	Three M5 threaded holes, 120° apart on 57 mm (2,24 in) diameter circle	
	Two M5 threaded holes, 180° apart on 76,2 mm (3 in) diameter circle	
Net weight	2,3 kg	5 lb
Shipping weight	2,4 kg	5,3 lb

DIMENSION DRAWING

