



### Integrated Sound System



Designed, Engineered  
and Manufactured in ITALY

## APPLICATIONS

- Corporate Events
- Piano Bar - Live Club - Entertainment
- Meetings - Seminars - Conferences
- Live Music
- Private Parties - Buskers
- Health Centres

## FEATURES

- Completely integrated ready-wired sound system
- Ultra lightweight polypropylene enclosure
- 3-way tri-amplified bass reflex system
- 14 channel mixer with 99 presets digital multieffect
- USB connection
- 15" high efficiency and high excursion custom neodymium magnet woofer with a 3" voice coil
- 2 x 2-way satellite speakers
- 500W RMS class D amplifier for subwoofer
- 2 x 150W RMS class D amplifier for the satellite speakers
- Switch mode power supply
- Designed, engineered and manufactured in Italy

## PRODUCT DESCRIPTION

The new AMICO 10 USB is a completely integrated ready-wired sound system offering a convenient plug & play solution. The mixer, amplification and subwoofer are contained in a single ultra lightweight, yet extremely sturdy polypropylene enclosure. AMICO's large diameter wheels and cover/lid with a built-in transport handle ensure maximum portability. Bass-reflex designed B&C subwoofer with a 15" high excursion neodymium magnet woofer. 3 class D power amplifiers with switch mode power supplies to power the subwoofer and the two satellite speakers.

Built-in mixing console with 6 x XLR mic inputs with phantom power supply, 2 x mono inputs, 4 x stereo input channels, 3-band EQ, 99 selectable digital effects with effects send and return controls, 1 x effect send, 1 x monitor send, headphone, master volume control, USB input/output to play back music programs/files from a computer or to record from the master audio output of the AMICO 10 USB to a computer-recording program.

The AMICO 10 USB provides a quick and easy set-up: complete system setup in less than 5 minutes !

## ELECTRICAL PERFORMANCE

Configuration 3 way / sub + 2 sat  
Internal amplifiers 500 + 2 x 150W RMS

### SUB

Low frequency woofer 1 x 15" - 3" coil  
Frequency response 40Hz - 120Hz  
Max. SPL (cont / peak) 124 / 130dB  
Dispersion omnidirectional  
Sensitivity @1W, 1m 97dB

### SAT

Low frequency woofer 1 x 6,5" - 1,5" coil  
High frequency driver 1 x 1"  
Frequency response 90Hz - 20kHz  
Max. SPL (cont / peak) 115 / 125dB  
Dispersion 90° H x 60° V  
Sensitivity @1W, 1m 93,5dB


## PHYSICAL

Enclosure material polypropylene  
Power supply cable 16,4 ft.  
Net dimensions (WxHxD) 18,8 x 30,7 x 17 inch  
Net weight 74lb  
Transport dimensions (WxHxD) 22,4 x 36,5 x 22,4 inch  
Transport weight 81,6lb  
Supplied accessories carrying cover,  
twin speakon-speakon cables,  
2 aluminium stands




## DIAGRAMS

250




500




Horizontal Polar Diagrams (Hz)


4000




8000




1000




2000




12500




16000



250




500




Vertical Polar Diagrams (Hz)


4000




8000




1000




2000




12500



16000




## Frequency response

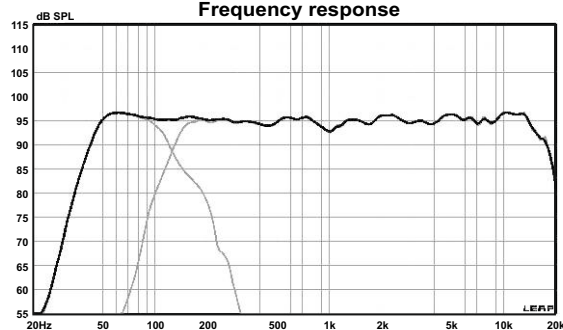





## GENERAL FEATURES

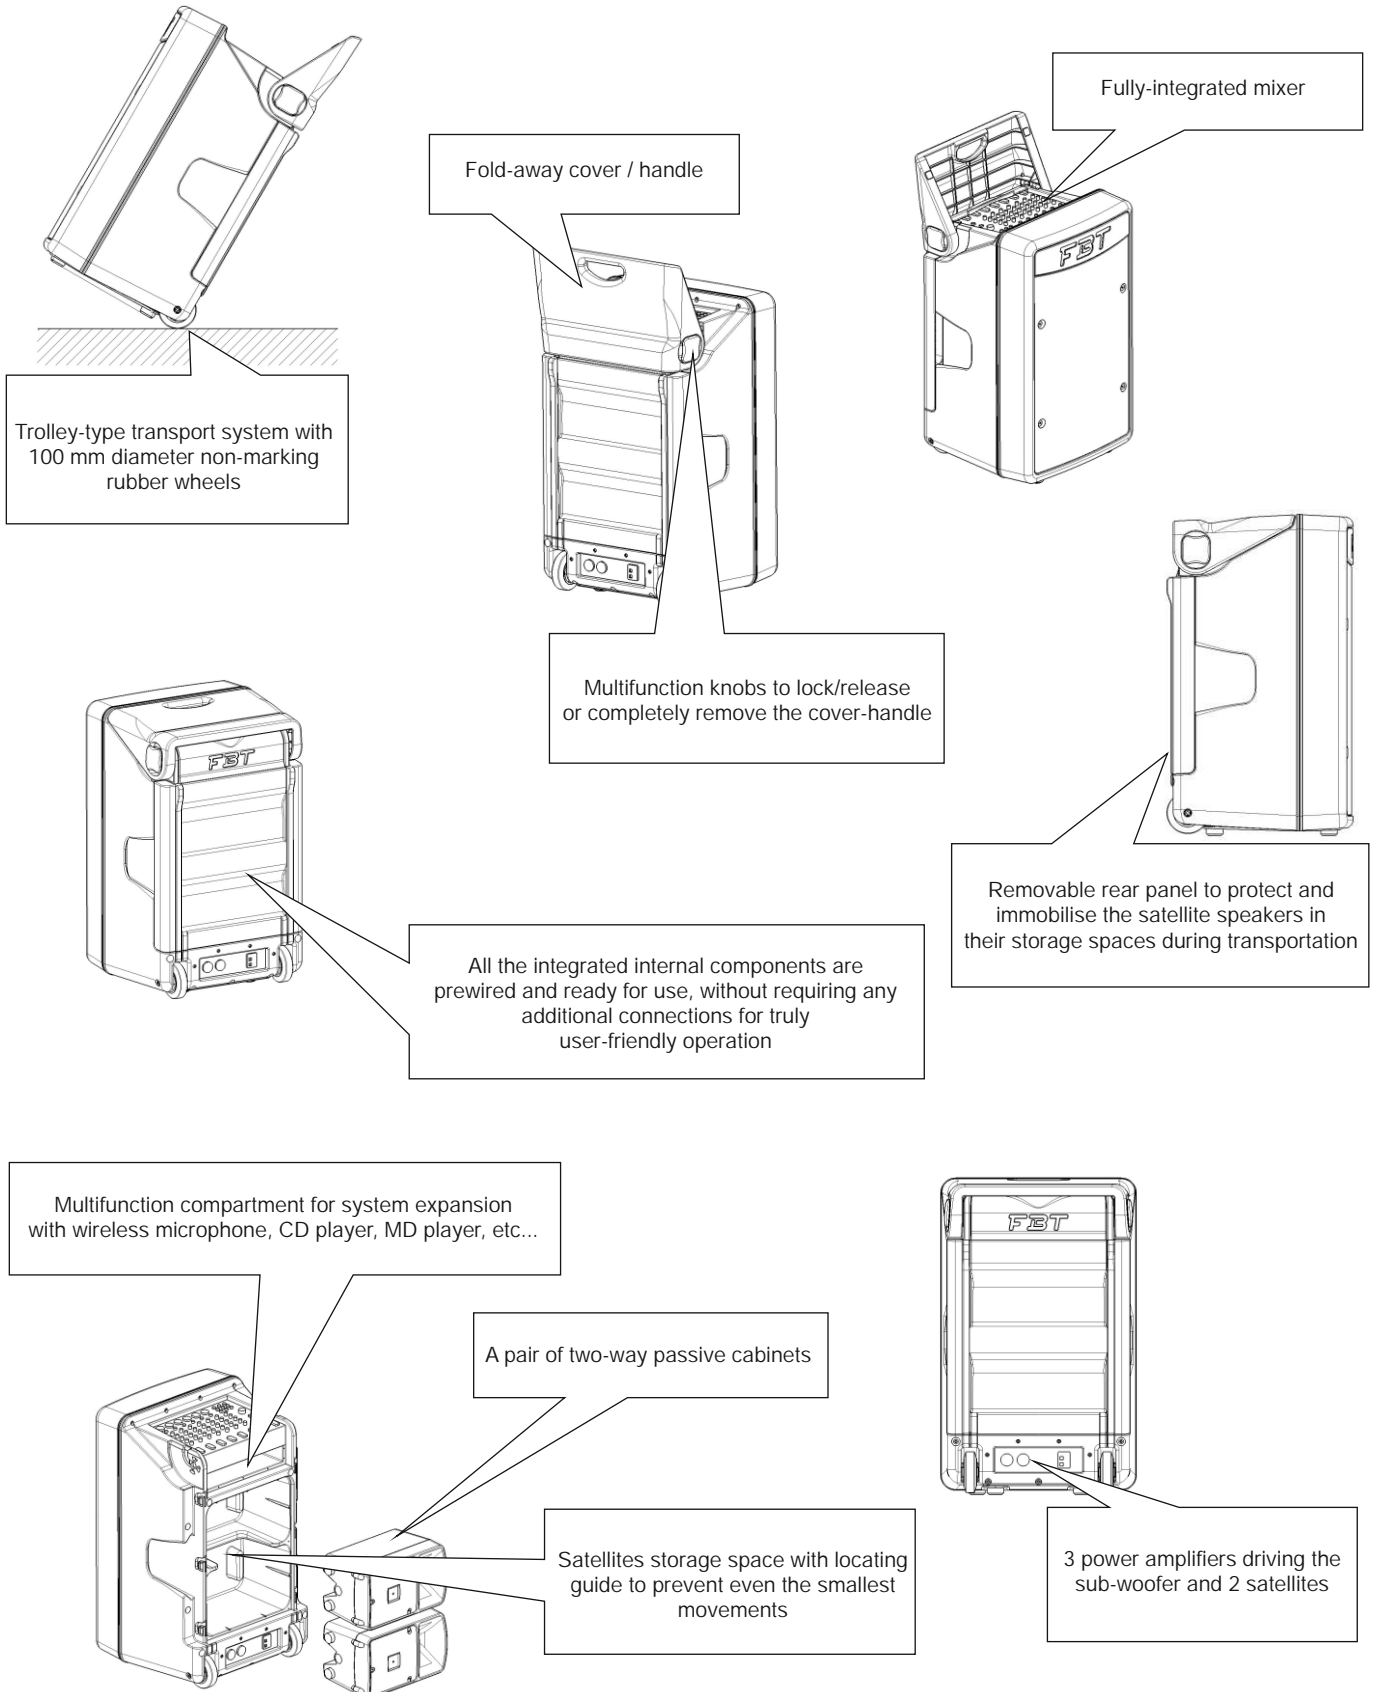




## CONTROL PANEL

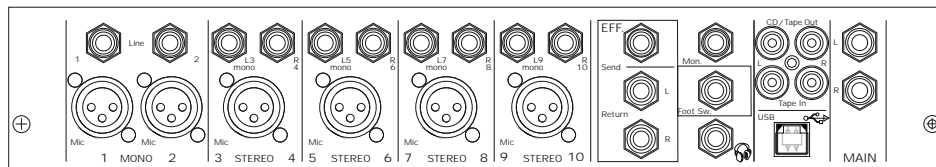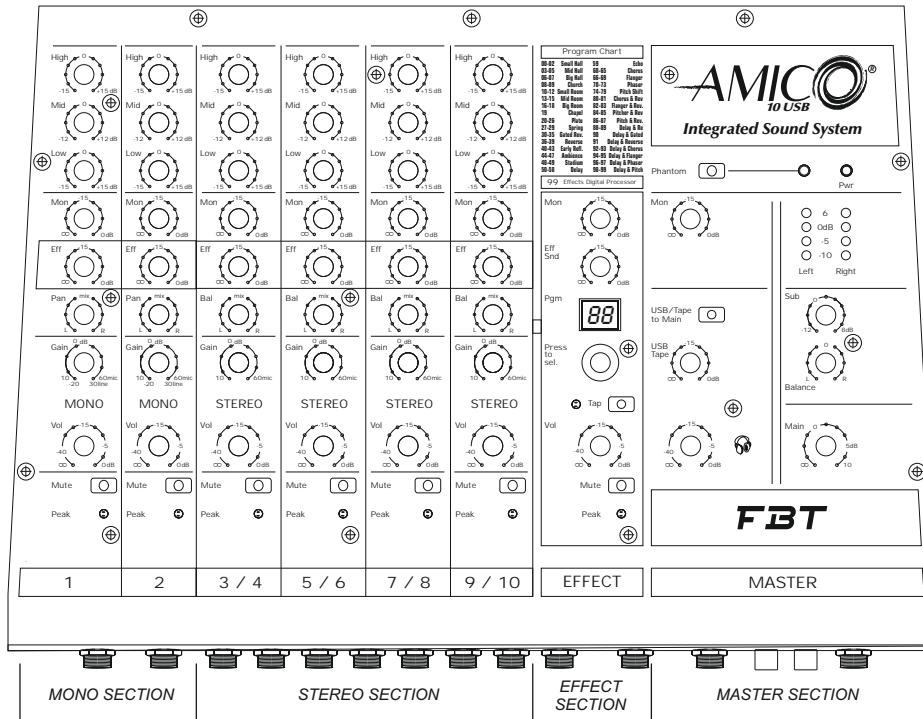

## SUPPLY AND POWER SECTION

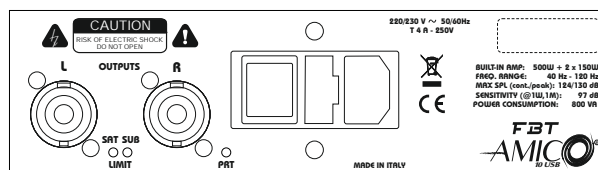

## OPTIONAL ACCESSORIES

Tote bag to hold 2 Speakon-Speakon cables and two aluminium stands for the satellite speakers



## DIMENSION DRAWING

