


12AY7/6072

R. F. DOUBLE TRIODE



Base: NOVAL

$U_f = 6,3$ or $12,6$ V
 $I_f = 300$ or 150 mA

Typical Characteristics:


$U_a = 250$ V
 $U_g = -4$ V
 $I_a = 3,0$ mA
 $S = 1,75$ mA/V
 $R_i = 22,8$ k Ω
 $\mu = 40$

Limiting Values:

$U_a = 300$ V
 $U_g = -50$ V
 $W_a = 1,5$ W
 $U_{k/f} = \pm 90$ V
 $I_k = 10$ mA

Capacitances:

| | system I. | system II. | |
|-----------------|-----------|------------|----|
| $C_{g/k} = 1,6$ | 1,6 | 1,6 | pF |
| $C_a = 0,33$ | 0,33 | 0,33 | pF |
| $C_{g/a} = 1,7$ | 1,7 | 1,7 | pF |

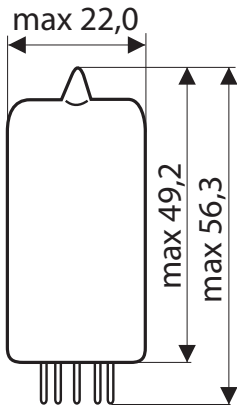

TRANSFER CHARACTERISTICS

PLATE CHARACTERISTICS

