

XXLS 10" Subwoofer



Type Number: 830846

Features:


This new series of state-of-the-art subwoofers continue to enhance Peerless' reputation for delivering the highest quality components for bass in the world. Called the XXLS - for "Xpanded Extra Long Stroke" - these new audio transducers add even more excursion to the Peerless XLS line, and completely eliminate distortion.

Driver Highlights: Thick Nomex cone, 51 mm voice coil, ALP, DVC

Specs:

Electrical Data				Power handling		
Nominal impedance	Zn	4	ohm	100h RMS noise test (IEC)	175	W
Minimum impedance	Zmin	3.1	ohm	Long-term Max System Power	350	W
Maximum impedance	Zo	71.5	ohm	(IEC)		
DC resistance	Re	2.6	ohm	Max linear SPL (rms) @ power		dB/W
Voice coil inductance	Le	1.6	mΗ	Short Term Max power		W
Capacitor in series with x ohm	Сс		uF	Voice Coil and Magnet Parameters		
T-S Parameters				Voice coil diameter	51	mm
Resonance Frequency	fs	24.3	Hz	Voice coil height	33	mm
Mechanical Q factor	Qms	9.24		Voice coil layers	2	
Electrical Q factor	Qes	0.34		Height of the gap	8	mm
Total Q factor	Qts	0.33		Linear excursion +/-	12.5	mm
Ratio fs/Qts	F	73		Max mech. excursion +/-		mm
Force factor	BI	10.1	Tm	Flux density of gap		mWb
Mechanical resistance	Rms	1.48	Kg/s	Total useful flux	2.3	mWb
Moving mass	Mms	89.7	g	Diameter of magnet	147	mm
Suspension compliance	Cms	0.48	mm/N	Height of magnet	35	mm
Effective cone diameter	D	21.2	cm	Weight of magnet	2.4	Kg
Effective piston area	Sd	352	cm ²			
Equivalent volume	Vas	81.8	Itrs			
Sensitivity		91	dB			
Ratio BL/√(Re)		6.3				

Frequency:

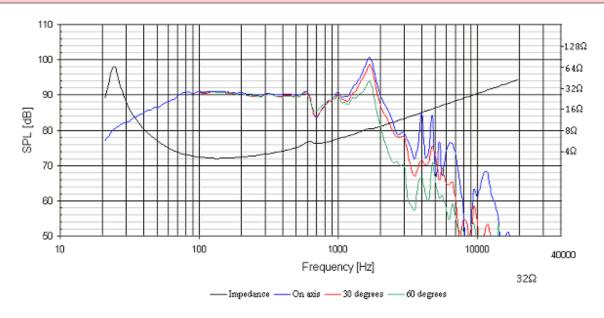

Mechanical Dimensions:

