

MHT 12 - 8 Ohm

Art. No. 1080







High-end tweeter-range magnetostat. Solid aluminium die-cast front. Effective from 4000 Hz upwards due to the large diaphragm area and low self-resonance. The extremely thin base layer of the diaphragm means there is very little mass to set in motion which guarantees a high degree of signal fidelity and broad frequency response. High efficiency is guaranteed by the neodymium boron magnets. Low distortion factor, good power-handling capabilities, highly linear impedance and amplitude frequency response and the broad frequency response range make the MHT 12 - 8 Ohm a highly versatile tweeter unit for the discerning listener. Screened magnets.

02.05.2013

MHT 12 - 8 Ohm

Art. No. 1080

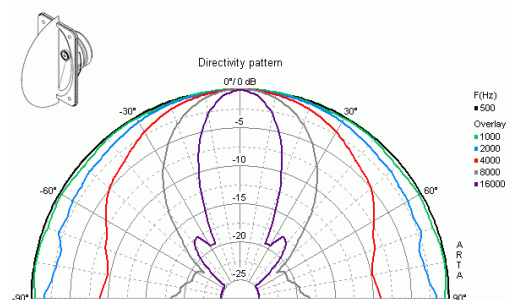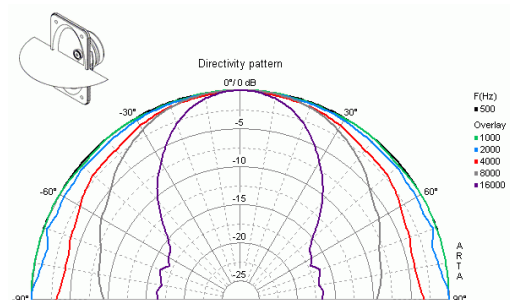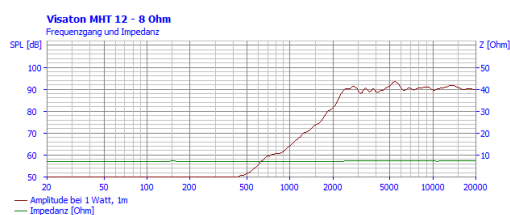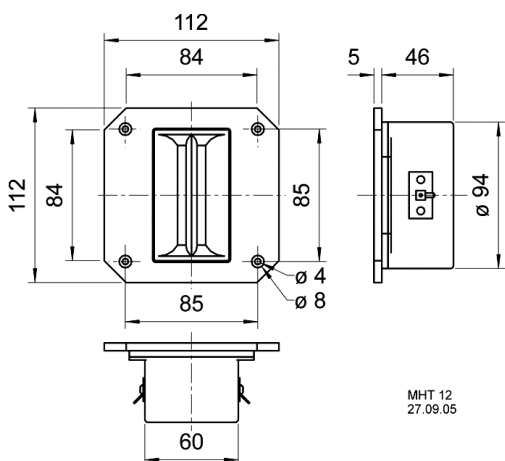

Technical data

Rated power	100 W (12 dB/Okt.; 4000 Hz)
Maximum power	150 W (12 dB/Okt.; 4000 Hz)
Nominal impedance Z	8 Ohm
Frequency response	2000–40000 Hz
Mean sound pressure level	91 dB (1 W/1 m)
Opening angle (-6 dB)	180°/4000 Hz hor. 110°/4000 Hz vert.
Cutout diameter	Ø 95 mm
Net weight	0,56 kg
D.C. resistance Rdc	6,9 Ohm
Connections	4,8 x 0,8 mm (+) 2,8 x 0,8 mm (-)