

## Polypropylene (PP) Capacitors for Very High Pulse Applications with Metal Foil Electrodes and Metallized Internal Series Connection in PCM 15 mm to 52.5 mm. Capacitances from 100 pF to 4.7 μF. Rated Voltages from 400 VDC to 6000 VDC.

### Special Features

- Extremely high pulse duty
- Self-healing
- Internal series connection
- Very low dissipation factor
- Negative capacitance change versus temperature
- AEC-Q200 qualified for PCM ≤ 37.5 mm (for larger box sizes on request)
- According to RoHS 2011/65/EU

### Typical Applications

- For high pulse and high frequency applications e.g.
- Switch mode power supplies
  - Converters in drives and power electronics
  - Deflection systems in monitors and TV-sets
  - Electronic ballasts

### Construction


#### Dielectric:

Polypropylene (PP) film

#### Capacitor electrodes:

Aluminium foil and double-sided metallized plastic film

#### Internal construction:

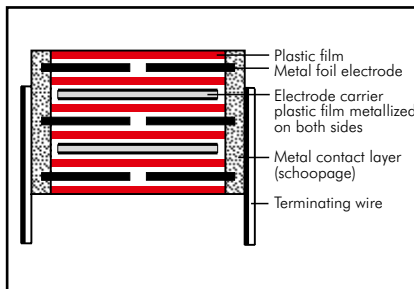

#### Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

#### Terminations:

Tinned wire.

#### Marking:

Colour: Red. Marking: Black.

### Electrical Data

#### Capacitance range:

100 pF to 4.7 μF (E12-values on request)

#### Rated voltages:

400 VDC, 630 VDC, 1000 VDC, 1250 VDC, 1600 VDC, 2000 VDC, 4000 VDC, 6000 VDC

#### Capacitance tolerances:

±20%, ±10%, ±5% (other tolerances are available subject to special enquiry)

#### Operating temperature range:

-55° C to +105° C

#### Climatic test category:

55/100/56 in accordance with IEC

#### Test voltage: 2 sec

PCM	< 4000 VDC	4000 VDC	6000 VDC
< 37.5	2 U <sub>r</sub>	2 U <sub>r</sub>	1.6 U <sub>r</sub>
≥ 37.5	2 U <sub>r</sub>	1.6 U <sub>r</sub>	1.2 U <sub>r</sub>

#### Dissipation factors at +20° C: tan δ

at f	C ≤ 0.1 μF	0.1 μF < C ≤ 1.0 μF	C > 1.0 μF
1 kHz	≤ 5 × 10 <sup>-4</sup>	≤ 5 × 10 <sup>-4</sup>	≤ 5 × 10 <sup>-4</sup>
10 kHz	≤ 6 × 10 <sup>-4</sup>	≤ 6 × 10 <sup>-4</sup>	-
100 kHz	≤ 10 × 10 <sup>-4</sup>	-	-

#### Maximum pulse rise time:

Capacitance pF/μF	max. pulse rise time V/μsec at T <sub>A</sub> < 40° C							
	400 VDC	630 VDC	1000 VDC	1250 VDC	1600 VDC	2000 VDC	4000 VDC	6000 VDC
100 ... 220	-	-	-	-	56000	56000	-	-
330 ... 680	-	-	-	-	51000	56000	56000	56000
1000 ... 2200	29000	29000	29000	29000	46000	51000	51000	51000
3300 ... 6800	9000	14000	27000	29000	29000	29000	29000	29000
0.01 ... 0.022	9000	11000	11000	11000	11000	13000	13000	13000
0.033 ... 0.068	9000	11000	11000	11000	11000	11000	13000	13000
0.1 ... 0.22	7000	11000	11000	11000	11000	11000	13000	13000
0.33 ... 0.68	6000	10000	11000	11000	11000	11000	-	-
1.0 ... 2.2	5000	6600	8300	9500	11000	-	-	-
3.3 ... 4.7	2500	-	-	-	-	-	-	-

### Mechanical Tests

#### Pull test on pins:

d ≤ 0.8 φ: 10 N in direction of pins  
d > 0.8 φ: 20 N in direction of pins according to IEC 60068-2-21

#### Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

#### Low air density:

1 kPa = 10 mbar in accordance with IEC 60068-2-13

#### Bump test:

4000 bumps at 390 m/sec<sup>2</sup> in accordance with IEC 60068-2-29

### Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

## Continuation

### General Data

Capacitance	400 VDC/250 VAC*					630 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	5	11	18	15	FKP1G011004B_	5	11	18	15	FKP1J011004B_
1500 "	5	11	18	15	FKP1G011504B_	5	11	18	15	FKP1J011504B_
2200 "	5	11	18	15	FKP1G012204B_	5	11	18	15	FKP1J012204B_
3300 "	5	11	18	15	FKP1G013304B_	5	11	18	15	FKP1J013304B_
4700 "	5	11	18	15	FKP1G014704B_	5	11	18	15	FKP1J014704B_
6800 "	5	11	18	15	FKP1G016804B_	6	12.5	18	15	FKP1J016804C_
0.01 µF	5	11	18	15	FKP1G021004B_	7	14	18	15	FKP1J021004D_
0.015 "	6	12.5	18	15	FKP1G021504C_	5	14	26.5	22.5	FKP1J021005A_
0.022 "	7	14	18	15	FKP1G022204D_	8	15	18	15	FKP1J021504F_
0.033 "	5	14	26.5	22.5	FKP1G022205A_	6	15	26.5	22.5	FKP1J021505B_
0.047 "	8	15	18	15	FKP1G023304F_	7	16.5	26.5	22.5	FKP1J022205D_
0.068 "	6	15	26.5	22.5	FKP1G023305B_	8.5	18.5	26.5	22.5	FKP1J023305F_
0.1 µF	7	16.5	26.5	22.5	FKP1G024705D_	10.5	20.5	26.5	22.5	FKP1J024705H_
0.15 "	8.5	18.5	26.5	22.5	FKP1G026805F_	9	19	31.5	27.5	FKP1J024706A_
0.22 "	9	19	31.5	27.5	FKP1G031005H_	11	21	31.5	27.5	FKP1J026806B_
0.33 "	10.5	20.5	26.5	22.5	FKP1G031006A_	9	19	41.5	37.5	FKP1J026807A_
0.47 "	9	19	31.5	27.5	FKP1G031506B_	13	24	31.5	27.5	FKP1J031006D_
0.68 "	11	21	31.5	27.5	FKP1G031507C_	11	22	41.5	37.5	FKP1J031007B_
1.0 µF	13	24	31.5	27.5	FKP1G032206D_	13	24	41.5	37.5	FKP1J031507C_
1.5 "	11	22	41.5	37.5	FKP1G032207B_	15	26	41.5	37.5	FKP1J032207D_
2.2 "	13	24	41.5	37.5	FKP1G033307C_	19	32	41.5	37.5	FKP1J033307F_
3.3 "	17	29	41.5	37.5	FKP1G034707E_	20	39.5	41.5	37.5	FKP1J034707G_
4.7 "	19	32	41.5	37.5	FKP1G036807F_	24	45.5	41.5	37.5	FKP1J036807H_
10 µF	20	39.5	41.5	37.5	FKP1G041007G_	35	50	41.5	37.5	FKP1J041007J_
15 "	31	46	41.5	37.5	FKP1G041507I_	40	55	41.5	37.5	FKP1J041507K_
22 "	35	50	41.5	37.5	FKP1G042207J_	35	50	57	52.5	FKP1J041509F_
33 "	45	65	57	52.5	FKP1G043309F_	45	55	57	52.5	FKP1J042209H_
47 "					FKP1G044709J_					

\* AC voltages:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

#### Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 161.		

Rights reserved to amend design data without prior notification.

Continuation page 81

## Continuation

### General Data

Capacitance	1000 VDC/600 VAC*				
	W	H	L	PCM**	Part number
1000 pF	5	11	18	15	FKP1O111004B_____
1500 "	5	11	18	15	FKP1O111504B_____
2200 "	5	11	18	15	FKP1O112204B_____
3300 "	5	11	18	15	FKP1O113304B_____
4700 "	6	12.5	18	15	FKP1O114704C_____
6800 "	7	14	18	15	FKP1O116804D_____
0.01 μF	8	15	18	15	FKP1O121004F_____
	6	15	26.5	22.5	FKP1O121005B_____
0.015 "	6	15	26.5	22.5	FKP1O121505B_____
0.022 "	8.5	18.5	26.5	22.5	FKP1O122205F_____
0.033 "	10.5	20.5	26.5	22.5	FKP1O123305H_____
0.047 "	9	19	31.5	27.5	FKP1O123306A_____
	11	21	31.5	27.5	FKP1O124706B_____
0.068 "	13	24	31.5	27.5	FKP1O126806D_____
	11	22	41.5	37.5	FKP1O126807B_____
0.1 μF	13	24	41.5	37.5	FKP1O131007C_____
	15	26	41.5	37.5	FKP1O131507D_____
0.22 "	19	32	41.5	37.5	FKP1O132207F_____
0.33 "	20	39.5	41.5	37.5	FKP1O133307G_____
0.47 "	31	46	41.5	37.5	FKP1O134707I_____
0.68 "	35	50	41.5	37.5	FKP1O136807J_____
1.0 μF	40	55	41.5	37.5	FKP1O141007K_____
	35	50	57	52.5	FKP1O141009F_____
1.5 "	45	55	57	52.5	FKP1O141509H_____
2.2 "	45	65	57	52.5	FKP1O142209J_____

\* AC voltages:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing

Dims. in mm.


Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

#### Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD


Taped version see page 161.

#### 2-pin version

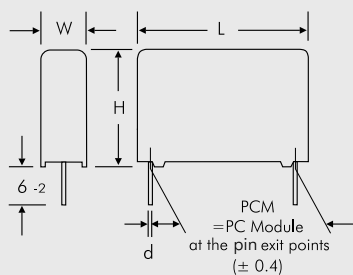

∅ d	PCM
0.8	15 - 27.5
1.0	37.5

#### 4-pin version



W	PCM	b	∅ d	c
17	37.5	10	1.0	0.4
19	37.5	10	1.0	0.4
20	37.5	12.5	1.0	0.4
24	37.5	12.5	1.0	0.4
31	37.5	20	1.0	0.4
35	37.5	20	1.0	0.4
40	37.5	20	1.0	0.4
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Rights reserved to amend design data without prior notification

Continuation page 82

## Continuation

### General Data

Capacitance	1250 VDC/600 VAC*					1600 VDC/650 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF						5	11	18	15	FKP1T001004B_____
150 "						5	11	18	15	FKP1T001504B_____
220 "						5	11	18	15	FKP1T002204B_____
330 "						5	11	18	15	FKP1T003304B_____
470 "						5	11	18	15	FKP1T004704B_____
680 "						5	11	18	15	FKP1T006804B_____
1000 pF	5	11	18	15	FKP1R011004B_____	6	12.5	18	15	FKP1T011004C_____
1500 "	5	11	18	15	FKP1R011504B_____	5	14	26.5	22.5	FKP1T011005A_____
2200 "	5	11	18	15	FKP1R012204B_____	7	14	18	15	FKP1T011504D_____
3300 "	5	11	18	15	FKP1R012204B_____	5	14	26.5	22.5	FKP1T011505A_____
4700 "	6	12.5	18	15	FKP1R013304C_____	8	15	18	15	FKP1T012204F_____
6800 "	7	14	18	15	FKP1R014704D_____	5	14	26.5	22.5	FKP1T012205A_____
	8	15	18	15	FKP1R016804F_____	6	15	26.5	22.5	FKP1T013305B_____
	5	14	26.5	22.5	FKP1R016805A_____	7	16.5	26.5	22.5	FKP1T014705D_____
						8.5	18.5	26.5	22.5	FKP1T016805F_____
0.01 µF	7	16.5	26.5	22.5	FKP1R021005D_____	10.5	20.5	26.5	22.5	FKP1T021005H_____
0.015 "	8.5	18.5	26.5	22.5	FKP1R021505F_____	11	21	31.5	27.5	FKP1T021506B_____
0.022 "	10.5	20.5	26.5	22.5	FKP1R022205H_____	11	21	31.5	27.5	FKP1T022206B_____
0.033 "	11	21	31.5	27.5	FKP1R023306B_____	13	24	31.5	27.5	FKP1T023306D_____
	9	19	41.5	37.5	FKP1R023307A_____	13	24	41.5	37.5	FKP1T023307C_____
0.047 "	13	24	31.5	27.5	FKP1R024706D_____	13	24	41.5	37.5	FKP1T024707C_____
	11	22	41.5	37.5	FKP1R024707B_____					
0.068 "	11	22	41.5	37.5	FKP1R026807B_____	15	26	41.5	37.5	FKP1T026807D_____
0.1 µF	15	26	41.5	37.5	FKP1R031007D_____	17	29	41.5	37.5	FKP1T031007E_____
0.15 "	17	29	41.5	37.5	FKP1R031507E_____	20	39.5	41.5	37.5	FKP1T031507G_____
0.22 "	19	32	41.5	37.5	FKP1R032207F_____	24	45.5	41.5	37.5	FKP1T032207H_____
0.33 "	24	45.5	41.5	37.5	FKP1R033307H_____	31	46	41.5	37.5	FKP1T033307I_____
0.47 "	31	46	41.5	37.5	FKP1R034707I_____	40	55	41.5	37.5	FKP1T034707K_____
0.68 "	40	55	41.5	37.5	FKP1R036807K_____	35	50	57	52.5	FKP1T036809F_____
1.0 µF	35	50	57	52.5	FKP1R041009F_____	45	55	57	52.5	FKP1T041009H_____
1.5 "	45	65	57	52.5	FKP1R041509J_____					

\* AC voltages:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:	
Version code:	2-pin = 00 4-pin = D4
Tolerance:	20 % = M 10 % = K 5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 161.	

Rights reserved to amend design data without prior notification

Continuation page 83

## Continuation

### General Data

Capacitance	2000 VDC/700 VAC*					4000 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	5	11	18	15	FKP1U001004B_____					
150 "	5	11	18	15	FKP1U001504B_____					
220 "	5	11	18	15	FKP1U002204B_____					
330 "	6	12.5	18	15	FKP1U003304C_____					
470 "	6	12.5	18	15	FKP1U004704C_____	5	14	26.5	22.5	FKP1X004705A_____
680 "	6	12.5	18	15	FKP1U006804C_____	5	14	26.5	22.5	FKP1X006805A_____
1000 pF	7	14	18	15	FKP1U011004D_____	5	14	26.5	22.5	FKP1X011005A_____
	5	14	26.5	22.5	FKP1U011005A_____					
1500 "	6	15	26.5	22.5	FKP1U011505B_____	7	16.5	26.5	22.5	FKP1X011505D_____
2200 "	7	16.5	26.5	22.5	FKP1U012205D_____	8.5	18.5	26.5	22.5	FKP1X012205F_____
3300 "	7	16.5	26.5	22.5	FKP1U013305D_____	10.5	20.5	26.5	22.5	FKP1X013305H_____
4700 "	8.5	18.5	26.5	22.5	FKP1U014705F_____	11	21	31.5	27.5	FKP1X014706B_____
6800 "	10.5	20.5	26.5	22.5	FKP1U016805H_____	13	24	31.5	27.5	FKP1X016806D_____
0.01 µF	11	21	31.5	27.5	FKP1U021006B_____	15	26	31.5	27.5	FKP1X021006F_____
0.015 "	13	24	31.5	27.5	FKP1U021506D_____	13	24	41.5	37.5	FKP1X021507C_____
0.022 "	15	26	31.5	27.5	FKP1U022206F_____	17	29	41.5	37.5	FKP1X022207E_____
	13	24	41.5	37.5	FKP1U022207C_____					
0.033 "	13	24	41.5	37.5	FKP1U023307C_____	20	39.5	41.5	37.5	FKP1X023307G_____
0.047 "	17	29	41.5	37.5	FKP1U024707E_____	24	45.5	41.5	37.5	FKP1X024707H_____
0.068 "	19	32	41.5	37.5	FKP1U026807F_____	31	46	41.5	37.5	FKP1X026807I_____
0.1 µF	20	39.5	41.5	37.5	FKP1U031007G_____	35	50	41.5	37.5	FKP1X031007J_____
0.15 "	24	45.5	41.5	37.5	FKP1U031507H_____	40	55	41.5	37.5	FKP1X031507K_____
0.22 "	35	50	41.5	37.5	FKP1U032207J_____	45	55	57	52.5	FKP1X032209H_____
0.33 "	40	55	41.5	37.5	FKP1U033307K_____					
0.47 "	45	55	57	52.5	FKP1U034709H_____					
0.68 "	45	65	57	52.5	FKP1U036809J_____					

\* AC voltages:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

#### Part number completion:

Version code: 2-pin = 00

4-pin = D4

Tolerance: 20 % = M

10 % = K


5 % = J

Packing: bulk = S


Pin length: 6-2 = SD

Taped version see page 161.

#### 2-pin version

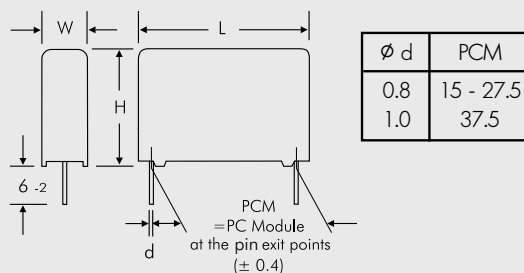

#### 4-pin version

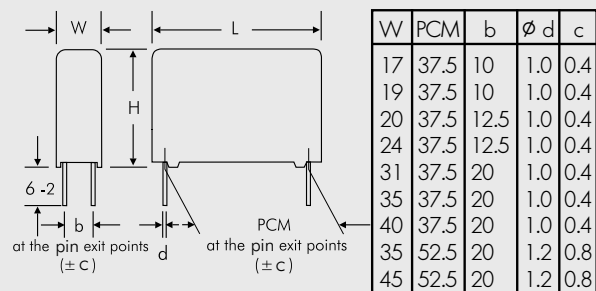

Rights reserved to amend design data without prior notification.

Continuation page 84

## Continuation

### General Data






Capacitance	6000 VDC/700 VAC*					Part number	Dims. in mm.																	
	W	H	L	PCM**																				
470 pF	5	14	26.5	22.5	FKP1Y004705A	Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.																		
680 "	5	14	26.5	22.5	FKP1Y006805A																			
1000 pF	5	14	26.5	22.5	FKP1Y011005A																			
1500 "	7	16.5	26.5	22.5	FKP1Y011505D																			
2200 "	10.5	20.5	26.5	22.5	FKP1Y012205H																			
3300 "	10.5	20.5	26.5	22.5	FKP1Y013305H																			
4700 "	11	21	31.5	27.5	FKP1Y014706B																			
6800 "	13	24	31.5	27.5	FKP1Y016806D																			
0.01 µF	15	26	31.5	27.5	FKP1Y021006F	<table border="1"> <thead> <tr> <th colspan="2">Part number completion:</th> </tr> </thead> <tbody> <tr> <td>Version code:</td> <td>2-pin = 00</td> </tr> <tr> <td></td> <td>4-pin = D4</td> </tr> <tr> <td>Tolerance:</td> <td>20 % = M</td> </tr> <tr> <td></td> <td>10 % = K</td> </tr> <tr> <td></td> <td>5 % = J</td> </tr> <tr> <td>Packing:</td> <td>bulk = S</td> </tr> <tr> <td>Pin length:</td> <td>6-2 = SD</td> </tr> <tr> <td colspan="2">Taped version see page 161.</td> </tr> </tbody> </table>	Part number completion:		Version code:	2-pin = 00		4-pin = D4	Tolerance:	20 % = M		10 % = K		5 % = J	Packing:	bulk = S	Pin length:	6-2 = SD	Taped version see page 161.	
Part number completion:																								
Version code:	2-pin = 00																							
	4-pin = D4																							
Tolerance:	20 % = M																							
	10 % = K																							
	5 % = J																							
Packing:	bulk = S																							
Pin length:	6-2 = SD																							
Taped version see page 161.																								
0.015 "	13	24	41.5	37.5	FKP1Y021507C																			
0.022 "	17	29	41.5	37.5	FKP1Y022207E																			
0.033 "	20	39.5	41.5	37.5	FKP1Y023307G																			
0.047 "	24	45.5	41.5	37.5	FKP1Y024707H																			
0.068 "	31	46	41.5	37.5	FKP1Y026807I																			
0.1 µF	35	50	41.5	37.5	FKP1Y031007J																			
0.15 "	40	55	41.5	37.5	FKP1Y031507K																			
0.22 "	45	55	57	52.5	FKP1Y032209H																			

\* AC voltages:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing

Rights reserved to amend design data without prior notification.









Impedance change with frequency (general guide).

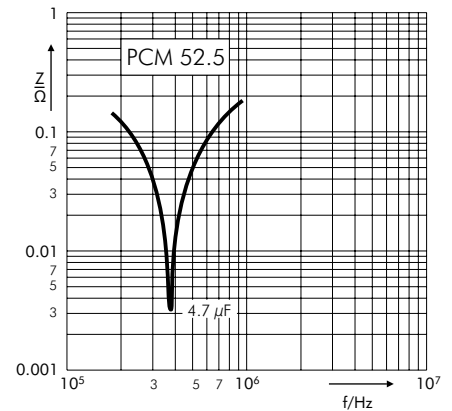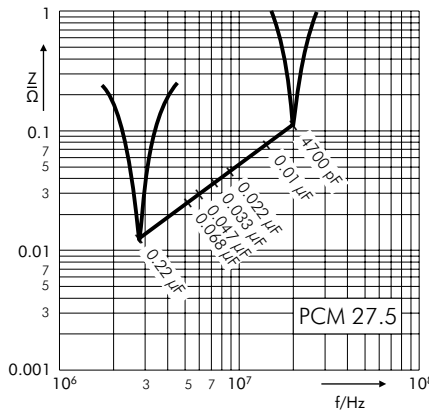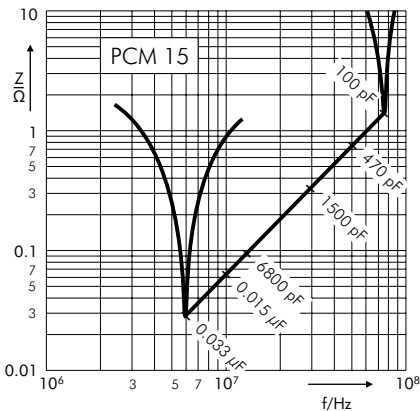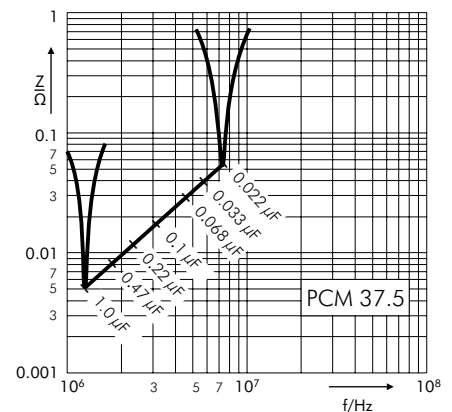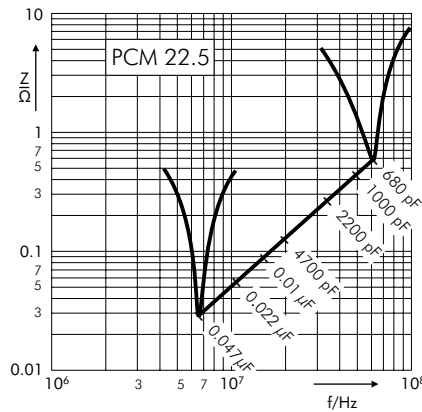

## Continuation

Permissible AC voltage in relation to frequency till 15° C internal temperature rise (general guide).









The information behind the cross bar denote the PCM of the measured value.

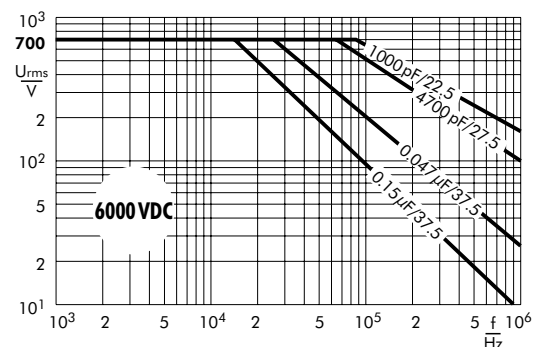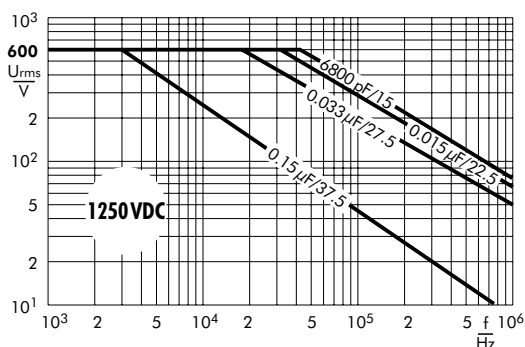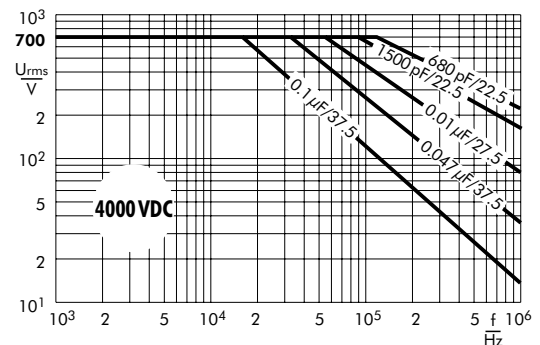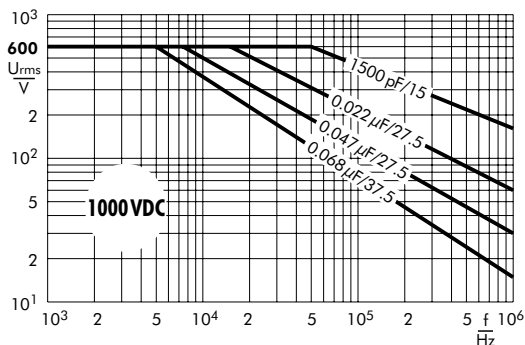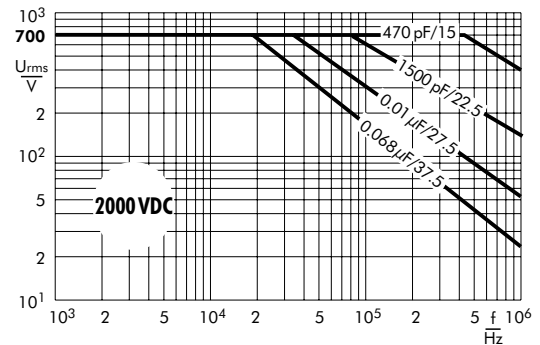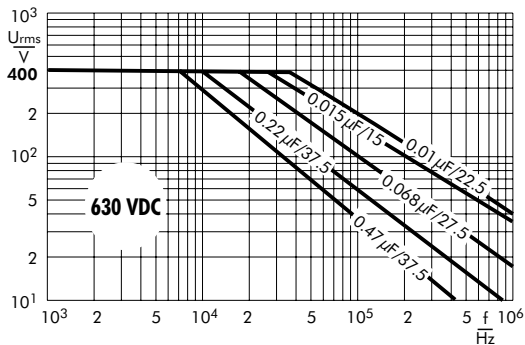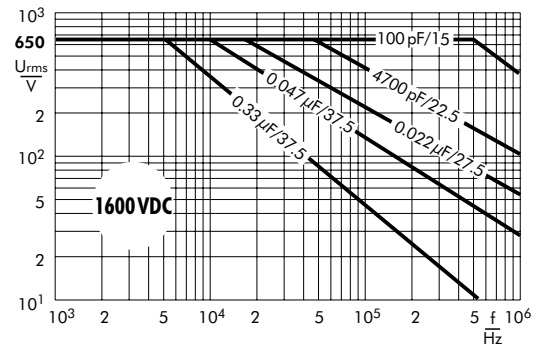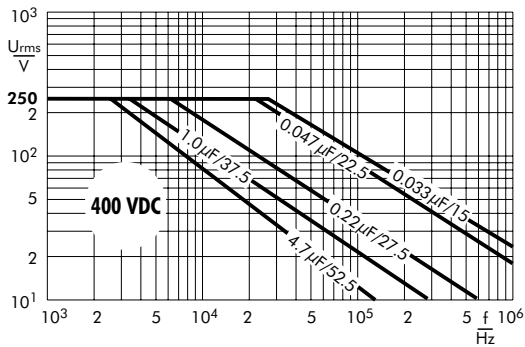

## Continuation

Permissible AC current in relation to frequency till 15° C internal temperature rise (general guide).

The information behind the cross bar denote the PCM of the measured value.

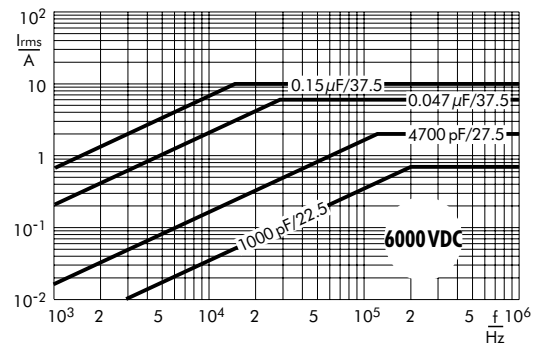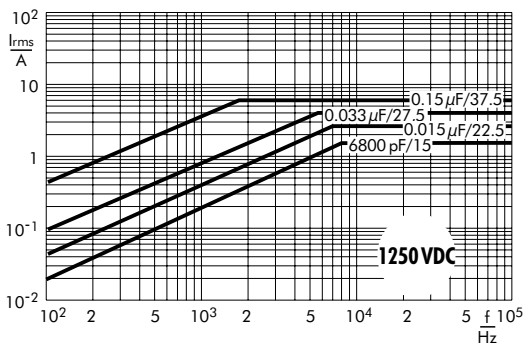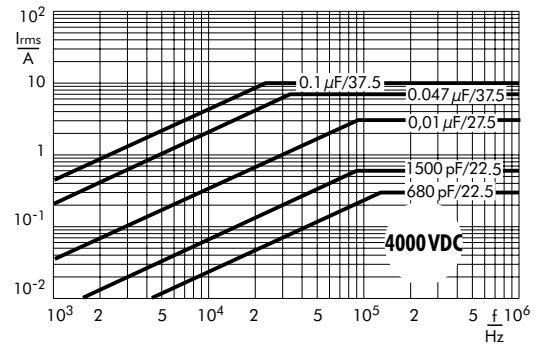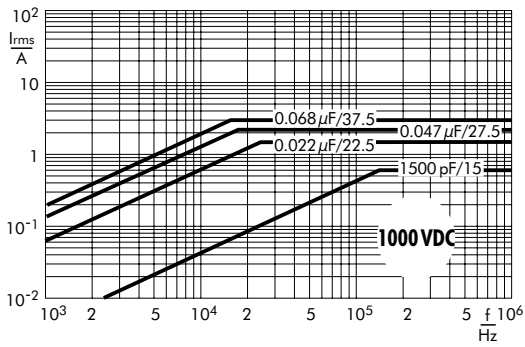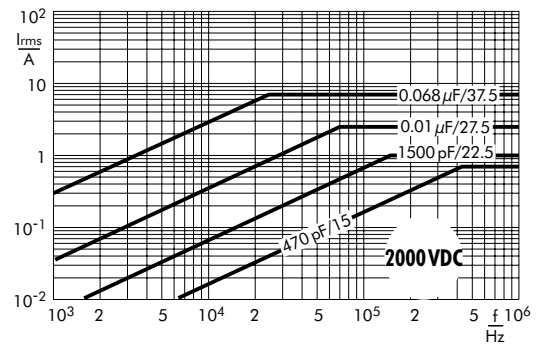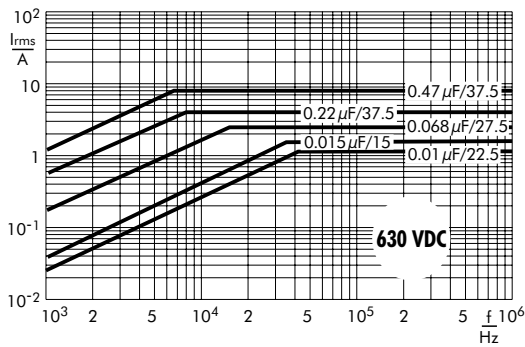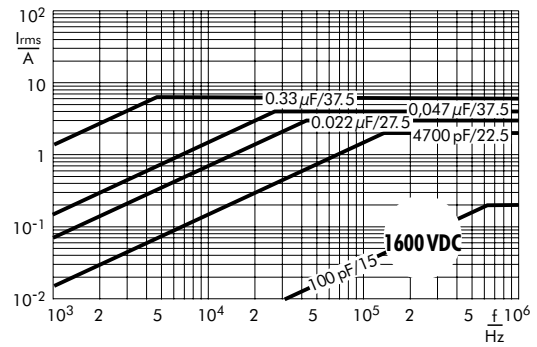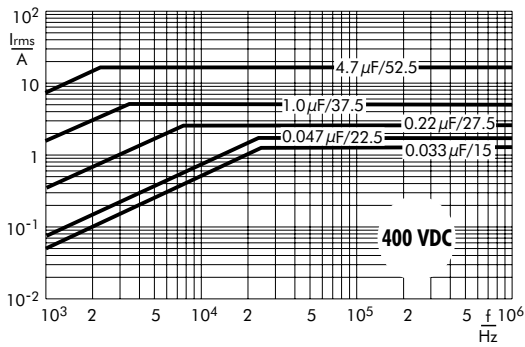



## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating:  $T_{max.} \leq 125^{\circ}C$   
 soldering:  $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating:  $T_{max.} \leq 100^{\circ}C$   
 soldering:  $T_{max.} \leq 110^{\circ}C$


### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
 Dwell time:  $t < 5 \text{ sec}$

### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
 Dwell time:  $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

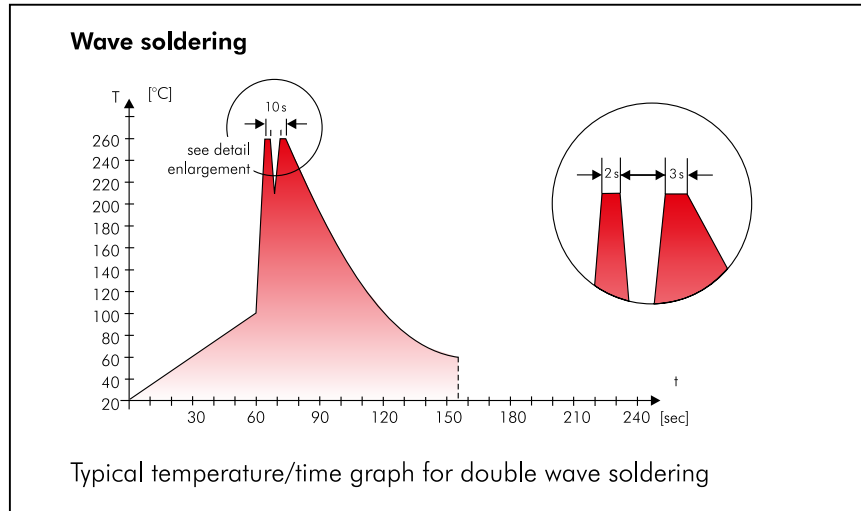

## WIMA Quality and Environmental Philosophy

### ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

# Typical Dimensions for Taping Configuration

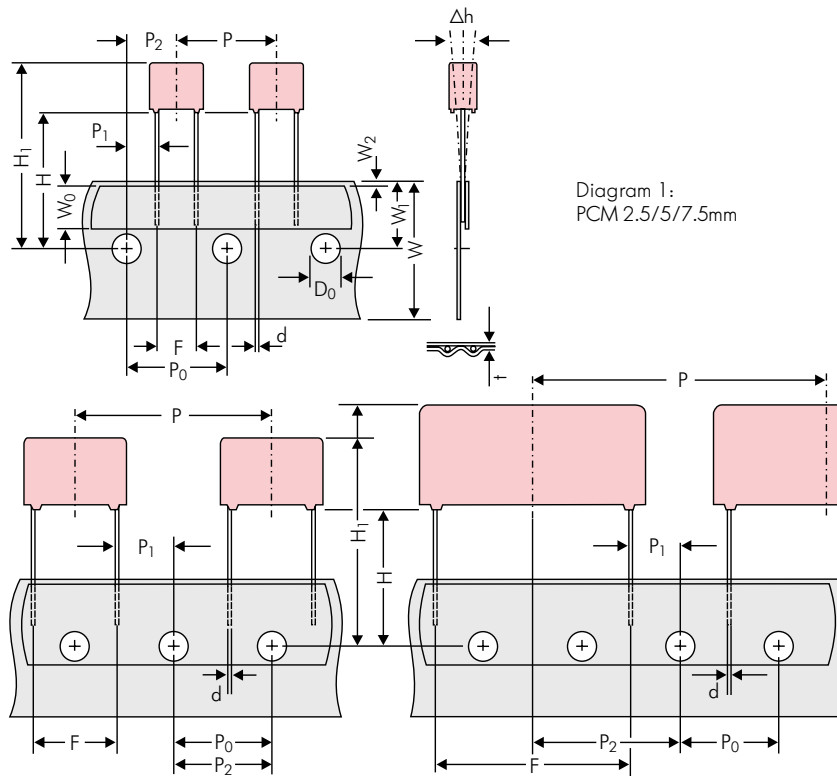


Diagram 1:  
PCM 2.5/5/7.5mm

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5\*mm

\*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping							
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping	
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5	
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	
Feed hole centre to pin	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7	
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3	
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0	
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.8</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8	
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	
Package (see also page 162)	ROLL/AMMO				AMMO				
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions	REEL φ 360 max. φ 30 ±1				B 52 ±2 58 ±2 or 66 ±2 } depending on PCM and component dimensions	REEL φ 500 max. φ 25 ±1
Unit	see details page 163.								

Dims in mm.

\* Diameter of pins see General Data.


\* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P<sub>0</sub> = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

## Types of Tape Packaging of Capacitors for Automatic Radial Insertion


### ■ ROLL Packaging

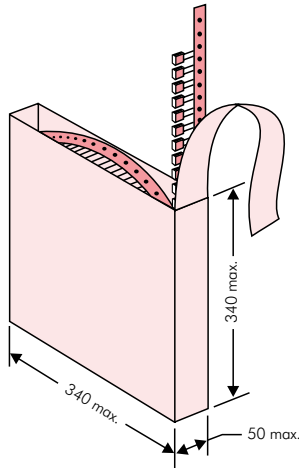

### ■ AMMO Packaging

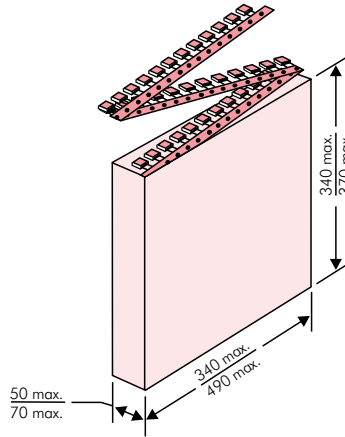

### ■ REEL Packaging

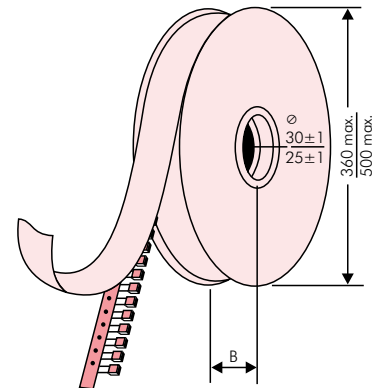

## BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- technical note
- capacitance tolerance
- packing
- connecting information

BARCODE PDF417  
BARCODE 2D Datamatrix

<b>WIMA Best Capacitors Made in Germany</b>	
Werk Aurich	
Supplier-ID: LIEF.NR.	Date Code: 20210419
Purchase Order No. (P/O): Bestellung xyz	P/O line: 100
Customer Part No.: KUNDENTEILENUMMER	
WIMA Part No.: MKP1F041006B00KSSD	Quantity: 459
WIMA Confirmation No.: 0001105072000100	RoHS 2011/65/EU
	COO: DE
Customer No.: 0000100002	
Gross Weight [g]: 4557	
WIMA - MKP 10	WIMA Part No.: MKP1F041006B00KSSD
MKP 10 1.0 µF 250 VDC 11x21x31.5 RM27.5	
Standard 10% Lose - Standard Drähte 6-2	
Vorlage Debitor Inland	
	0001105072000100
1002021443	QTY: 459 Week 19/2021

# Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	pcs. per packing unit										
						ROLL		REEL				AMMO				
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 x 340	490 x 370				
					N	O	F	I	H	J	A	C	B	D		
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	5000		2200		2500		-		2800		-	
	3	7.5	4.6	<b>0C</b>	5000		2000		2300		-		2300		-	
	3.8	8.5	4.6	<b>0D</b>	5000		1500		1800		-		1800		-	
	4.6	9	4.6	<b>0E</b>	5000		1200		1500		-		1500		-	
	5.5	10	4.6	<b>0F</b>	5000		900		1200		-		1200		-	
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	5000		2200		2500		-		2800		-	
	3	7.5	7.2	<b>1B</b>	5000		2000		2300		-		2300		-	
	3.5	8.5	7.2	<b>1C</b>	5000		1600		2000		-		2000		-	
	4.5	6	7.2	<b>1D</b>	6000		1300		1500		-		1500		-	
	4.5	9.5	7.2	<b>1E</b>	4000		1300		1500		-		1500		-	
	5	10	7.2	<b>1F</b>	3500		1100		1400		-		1400		-	
	5.5	7	7.2	<b>1G</b>	4000		1000		1200		-		1200		-	
	5.5	11.5	7.2	<b>1H</b>	2500		1000		1200		-		1200		-	
	6.5	8	7.2	<b>1I</b>	2500		800		1000		-		1000		-	
	7.2	8.5	7.2	<b>1J</b>	2500		700		1000		-		1000		-	
	7.2	13	7.2	<b>1K</b>	2000		700		950		-		1000		-	
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>	5000		-		2500		4400		2500		-	
	3	8.5	10	<b>2B</b>	5000		-		2200		4300		2300		4150	
	4	9	10	<b>2C</b>	4000		-		1700		3200		1700		3000	
	4.5	9.5	10.3	<b>2D</b>	3500		-		1500		2900		1400		2700	
	5	10.5	10.3	<b>2E</b>	3000		-		1300		2500		1300		-	
	5.7	12.5	10.3	<b>2F</b>	2000		-		1000		2200		1100		-	
	7.2	12.5	10.3	<b>2G</b>	1500		-		900		1800		1000		-	
	<b>10 mm</b>	3	9	13	<b>3A</b>	3000		-		1100		2200		-		1900
		4	8.5	13.5	<b>FA</b>	3000		-		900		1600		-		1450
		4	9	13	<b>3C</b>	3000		-		900		1600		-		1450
		4	9.5	13	<b>3D</b>	3000		-		900		1600		-		1400
5		10	13.5	<b>FB</b>	2000		-		700		1300		-		1200	
5		11	13	<b>3F</b>	3000		-		700		1300		-		1100	
6		12	13	<b>3G</b>	2400		-		550		1100		-		1000	
6		12.5	13	<b>3H</b>	2400		-		550		1100		-		1000	
<b>15 mm</b>	8	12	13	<b>3I</b>	2000		-		400		800		-		740	
	5	11	18	<b>4B</b>	2400		-		600		1200		-		1150	
	5	13	19	<b>FC</b>	1000		-		600		1200		-		1200	
	6	12.5	18	<b>4C</b>	2000		-		500		1000		-		1000	
	6	14	19	<b>FD</b>	1000		-		500		1000		-		1000	
	7	14	18	<b>4D</b>	1600		-		450		900		-		850	
	7	15	19	<b>FE</b>	1000		-		450		900		-		850	
	8	15	18	<b>4F</b>	1200		-		400		800		-		740	
	8	17	19	<b>FF</b>	500		-		400		800		-		740	
	9	14	18	<b>4H</b>	1200		-		350		700		-		650	
	9	16	18	<b>4J</b>	900		-		350		700		-		650	
<b>22.5 mm</b>	10	18	19	<b>FG</b>	500		-		300		650		-		590	
	11	14	18	<b>4M</b>	1000		-		300		600		-		540	
	5	14	26.5	<b>5A</b>	1200		-		-		800		-		770	
	6	15	26.5	<b>5B</b>	1000		-		-		700		-		640	
	7	16.5	26.5	<b>5D</b>	760		-		-		600		-		550	
	8	20	28	<b>FH</b>	500		-		-		500		-		480	
	8.5	18.5	26.5	<b>5F</b>	500		-		-		480		-		450	
	10	22	28	<b>FI</b>	570*		-		-		420		-		380	
10.5	19	26.5	<b>5G</b>	594*		-		-		400		-		360		
10.5	20.5	26.5	<b>5H</b>	594*		-		-		400		-		360		
11	21	26.5	<b>5I</b>	561*		-		-		380		-		350		
12	24	28	<b>FJ</b>	480*		-		-		350		-		310		

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



## Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit											
						ROLL		REEL				AMMO					
	W	H	L	Codes		S	N	O	ø 360		ø 500		340 x 340		490 x 370		
								H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
								F	I	H	J	A	C	B	D		
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>	567*	-	-	-	-	460/340*		-	-	-	-	-	-
	11	21	31.5	<b>6B</b>	459*	-	-	-	-	380/280*		-	-	-	-	-	-
	13	24	31.5	<b>6D</b>	378*	-	-	-	-	300		-	-	-	-	-	-
	13	25	33	<b>FK</b>	405*	-	-	-	-	-		-	-	-	-	-	-
	15	26	31.5	<b>6F</b>	324*	-	-	-	-	270		-	-	-	-	-	-
	15	26	33	<b>FL</b>	324*	-	-	-	-	-		-	-	-	-	-	-
	17	29	31.5	<b>6G</b>	198*	-	-	-	-	-		-	-	-	-	-	-
	17	34.5	31.5	<b>6I</b>	198*	-	-	-	-	-		-	-	-	-	-	-
	20	32	33	<b>FM</b>	162*	-	-	-	-	-		-	-	-	-	-	-
	20	39.5	31.5	<b>6J</b>	162*	-	-	-	-	-		-	-	-	-	-	-
<b>37.5 mm</b>	9	19	41.5	<b>7A</b>	441*	-	-	-	-	-	-	-	-	-	-	-	-
	11	22	41.5	<b>7B</b>	357*	-	-	-	-	-	-	-	-	-	-	-	-
	13	24	41.5	<b>7C</b>	294*	-	-	-	-	-	-	-	-	-	-	-	-
	15	26	41.5	<b>7D</b>	252*	-	-	-	-	-	-	-	-	-	-	-	-
	17	29	41.5	<b>7E</b>	154*	-	-	-	-	-	-	-	-	-	-	-	-
	19	32	41.5	<b>7F</b>	140*	-	-	-	-	-	-	-	-	-	-	-	-
	20	39.5	41.5	<b>7G</b>	126*	-	-	-	-	-	-	-	-	-	-	-	-
	24	45.5	41.5	<b>7H</b>	112*	-	-	-	-	-	-	-	-	-	-	-	-
	28	38	41.5	<b>7L</b>	84*	-	-	-	-	-	-	-	-	-	-	-	-
	31	46	41.5	<b>7I</b>	84*	-	-	-	-	-	-	-	-	-	-	-	-
	35	50	41.5	<b>7J</b>	35*	-	-	-	-	-	-	-	-	-	-	-	-
	40	55	41.5	<b>7K</b>	28*	-	-	-	-	-	-	-	-	-	-	-	-
<b>48.5 mm</b>	19	31	56	<b>8D</b>	120*	-	-	-	-	-	-	-	-	-	-	-	
	23	34	56	<b>8E</b>	80*	-	-	-	-	-	-	-	-	-	-	-	
	27	37.5	56	<b>8H</b>	84*	-	-	-	-	-	-	-	-	-	-	-	
	33	48	56	<b>8J</b>	25*	-	-	-	-	-	-	-	-	-	-	-	
	37	54	56	<b>8L</b>	25*	-	-	-	-	-	-	-	-	-	-	-	
<b>52.5 mm</b>	25	45	57	<b>9D</b>	70*	-	-	-	-	-	-	-	-	-	-	-	
	30	45	57	<b>9E</b>	60*	-	-	-	-	-	-	-	-	-	-	-	
	35	50	57	<b>9F</b>	25*	-	-	-	-	-	-	-	-	-	-	-	
	45	55	57	<b>9H</b>	20*	-	-	-	-	-	-	-	-	-	-	-	
	45	65	57	<b>9J</b>	20*	-	-	-	-	-	-	-	-	-	-	-	

\* for 2-inch transport pitches.

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.

Updated data on [www.wima.com](http://www.wima.com)



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
<b>M</b>	<b>K</b>	<b>S</b>	<b>2</b>	<b>C</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>A</b>	<b>0</b>	<b>0</b>	<b>M</b>	<b>S</b>	<b>S</b>	<b>D</b>
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6 -2		

<p><b>Type description:</b></p> <p>SMD-PET = SMDT                  SMD-PEN = SMDN                  SMD-PPS = SMDI                  FKP 02 = FKPO                  MKS 02 = MKS0                  FKS 2 = FKS2                  FKP 2 = FKP2                  FKS 3 = FKS3                  FKP 3 = FKP 3                  MKS 2 = MKS2                  MKP 2 = MKP2                  MKS 4 = MKS4                  MKP 4 = MKP4                  MKP 10 = MKP1                  FKP 4 = FKP4                  FKP 1 = FKP1                  MKP-X2 = MKX2                  MKP-X1 R = MKX1                  MKP-Y2 = MKY2                  MP 3-X2 = MPX2                  MP 3-X1 = MPX1                  MP 3-Y2 = MPY2                  MP 3R-Y2 = MPRY                  MKP 4F = MKPF                  Snubber MKP = SNMP                  Snubber FKP = SNFP                  GTO MKP = GTOM                  DC-LINK MKP 4 = DCP4                  DC-LINK MKP 6 = DCP6                  DC-LINK HC = DCHC</p>	<p><b>Rated voltage:</b></p> <p>50 VDC = B0                  63 VDC = C0                  100 VDC = D0                  250 VDC = F0                  400 VDC = G0                  450 VDC = H0                  520 VDC = H2                  600 VDC = I0                  630 VDC = J0                  700 VDC = K0                  800 VDC = L0                  850 VDC = M0                  900 VDC = N0                  1000 VDC = O1                  1100 VDC = P0                  1200 VDC = Q0                  1250 VDC = R0                  1500 VDC = S0                  1600 VDC = T0                  1700 VDC = TA                  2000 VDC = U0                  2500 VDC = V0                  3000 VDC = W0                  4000 VDC = X0                  6000 VDC = Y0                  250 VAC = 0W                  275 VAC = 1W                  300 VAC = 2W                  305 VAC = AW                  350 VAC = BW                  440 VAC = 4W                  500 VAC = 5W                  ...</p>	<p><b>Capacitance:</b></p> <p>22 pF = 0022                  47 pF = 0047                  100 pF = 0100                  150 pF = 0150                  220 pF = 0220                  330 pF = 0330                  470 pF = 0470                  680 pF = 0680                  1000 pF = 1100                  1500 pF = 1150                  2200 pF = 1220                  3300 pF = 1330                  4700 pF = 1470                  6800 pF = 1680                  0.01 µF = 2100                  0.022 µF = 2220                  0.047 µF = 2470                  0.1 µF = 3100                  0.22 µF = 3220                  0.47 µF = 3470                  1 µF = 4100                  2.2 µF = 4220                  4.7 µF = 4470                  10 µF = 5100                  22 µF = 5220                  47 µF = 5470                  100 µF = 6100                  220 µF = 6220                  1000 µF = 7100                  1500 µF = 7150                  ...</p>	<p><b>Size:</b></p> <p>4.8x3.3x3 Size 1812 = KA                  4.8x3.3x4 Size 1812 = KB                  5.7x5.1x3.5 Size 2220 = QA                  5.7x5.1x4.5 Size 2220 = QB                  7.2x6.1x3 Size 2824 = TA                  7.2x6.1x5 Size 2824 = TB                  10.2x7.6x5 Size 4030 = VA                  12.7x10.2x6 Size 5040 = XA                  15.3x13.7x7 Size 6054 = YA                  2.5x7x4.6 PCM 2.5 = 0B                  3x7.5x4.6 PCM 2.5 = 0C                  2.5x6.5x7.2 PCM 5 = 1A                  3x7.5x7.2 PCM 5 = 1B                  2.5x7x10 PCM 7.5 = 2A                  3x8.5x10 PCM 7.5 = 2B                  3x9x13 PCM 10 = 3A                  4x9x13 PCM 10 = 3C                  5x11x18 PCM 15 = 4B                  6x12.5x18 PCM 15 = 4C                  5x14x26.5 PCM 22.5 = 5A                  6x15x26.5 PCM 22.5 = 5B                  9x19x31.5 PCM 27.5 = 6A                  11x21x31.5 PCM 27.5 = 6B                  9x19x41.5 PCM 37.5 = 7A                  11x22x41.5 PCM 37.5 = 7B                  19x31x56 PCM 48.5 = 8D                  25x45x57 PCM 52.5 = 9D                  ...</p> <p><b>Version code:</b></p> <p>Standard = 00                  Version A1 = 1A                  Version A1.1.1 = 1B                  Version A2 = 2A                  ...</p>	<p><b>Tolerance:</b></p> <p>±20% = M                  ±10% = K                  ±5% = J                  ±2.5% = H                  ±1% = E                  ...</p> <p><b>Packing:</b></p> <p>AMMO H16.5 340x340 = A                  AMMO H16.5 490x370 = B                  AMMO H18.5 340x340 = C                  AMMO H18.5 490x370 = D                  REEL H16.5 360 = F                  REEL H16.5 500 = H                  REEL H18.5 360 = I                  REEL H18.5 500 = J                  ROLL H16.5 = N                  ROLL H18.5 = O                  BLISTER W12 180 = P                  BLISTER W12 330 = Q                  BLISTER W16 330 = R                  BLISTER W24 330 = T                  Bulk/TPS Standard = S                  ...</p> <p><b>Pin length (untaped)</b></p> <p>3.5 ±0.5 = C9                  6 -2 = SD                  16 ±1 = P1                  ...</p> <p><b>Pin length (taped)</b></p> <p>none = 00</p>
---	---	---	--	---

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

## Polypropylene (PP) Film and Foil Capacitors for Pulse Applications in PCM 5 mm

### Special Features

- Pulse duty construction
- Close tolerances up to  $\pm 2.5\%$  ( $\pm 1\%$  on request)
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EU

### Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- LC-Filtering
- Oscillating circuits
- Audio equipment

### Construction


#### Dielectric:

Polypropylene (PP) film

#### Capacitor electrodes:

Metal foil

#### Internal construction:

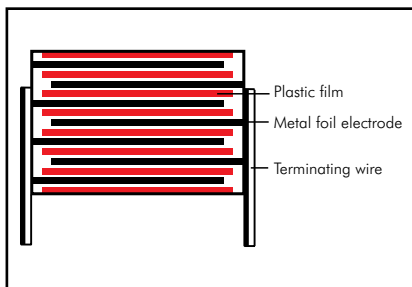

#### Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

#### Terminations:

Tinned wire.

#### Marking:

Colour: Red. Marking: Black.

Epoxy resin seal: Yellow

### Electrical Data

#### Capacitance range:

33 pF to 0.033  $\mu$ F (E12-values on request)

#### Rated voltages:

63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC, 800 VDC, 1000 VDC

#### Capacitance tolerances:

$\pm 10\%$ ,  $\pm 5\%$ ,  $\pm 2.5\%$  ( $\pm 2\%$ ,  $\pm 1.5\%$  or  $\pm 1\%$  available as precision capacitors subject to special enquiry)

#### Operating temperature range:

$-55^\circ\text{C}$  to  $+100^\circ\text{C}$

#### Test specifications:

In accordance with IEC 60384-13

#### Climatic test category:

55/100/56 in accordance with IEC

#### Insulation resistance at $+20^\circ\text{C}$ :

$\geq 5 \times 10^5 \text{ M}\Omega$

(mean value:  $1 \times 10^6 \text{ M}\Omega$ )

Measuring voltage:

$U_r = 63 \text{ V}$ ;  $U_{\text{test}} = 50 \text{ V/1 min.}$

$U_r \geq 100 \text{ V}$ ;  $U_{\text{test}} = 100 \text{ V/1 min.}$

#### Dissipation factors at $+20^\circ\text{C}$ : $\tan \delta$

at f	$C \leq 1000 \text{ pF}$	$1000 \text{ pF} < C \leq 4700 \text{ pF}$	$C > 4700 \text{ pF}$
1 kHz	$\leq 3 \times 10^{-4}$	$\leq 4 \times 10^{-4}$	$\leq 4 \times 10^{-4}$
10 kHz	$\leq 3 \times 10^{-4}$	$\leq 4 \times 10^{-4}$	$\leq 4 \times 10^{-4}$
100 kHz	$\leq 4 \times 10^{-4}$	$\leq 5 \times 10^{-4}$	-
1 MHz	$\leq 10 \times 10^{-4}$	-	-

**Test voltage:**  $2 U_r$ , 2 sec.

#### Maximum pulse rise time:

1000 V/ $\mu$ sec for pulses equal to the rated voltage

#### Dielectric absorption:

0.05%

#### Temperature coefficient:

$-200 \times 10^{-6}/^\circ\text{C}$  (typical)

#### Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from  $+85^\circ\text{C}$  for DC voltages and from  $+75^\circ\text{C}$  for AC voltages

#### Reliability:

Operational life  $> 300\,000$  hours

Failure rate  $< 5 \text{ fit}$  ( $0.5 \times U_r$  and  $40^\circ\text{C}$ )

### Mechanical Tests

#### Pull test on pins:

10 N in direction of pins according to IEC 60068-2-21

#### Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

#### Low air density:

1kPa = 10 mbar in accordance with IEC 60068-2-13

#### Bump test:

4000 bumps at 390 m/sec<sup>2</sup> in accordance with IEC 60068-2-29

### Packing

Available taped and reeled.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

## Continuation

### General Data

Capacitance	63 VDC/40 VAC*					100 VDC/63 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	4.5	6	7.2	5	FKP2C001001D00_____	4.5	6	7.2	5	FKP2D001001D00_____
150 "	4.5	6	7.2	5	FKP2C001501D00_____	4.5	6	7.2	5	FKP2D001501D00_____
220 "	4.5	6	7.2	5	FKP2C002201D00_____	4.5	6	7.2	5	FKP2D002201D00_____
330 "	4.5	6	7.2	5	FKP2C003301D00_____	4.5	6	7.2	5	FKP2D003301D00_____
470 "	4.5	6	7.2	5	FKP2C004701D00_____	4.5	6	7.2	5	FKP2D004701D00_____
680 "	4.5	6	7.2	5	FKP2C006801D00_____	4.5	6	7.2	5	FKP2D006801D00_____
1000 pF	4.5	6	7.2	5	FKP2C011001D00_____	4.5	6	7.2	5	FKP2D011001D00_____
1500 "	4.5	6	7.2	5	FKP2C011501D00_____	4.5	6	7.2	5	FKP2D011501D00_____
2200 "	4.5	6	7.2	5	FKP2C012201D00_____	4.5	6	7.2	5	FKP2D012201D00_____
3300 "	4.5	6	7.2	5	FKP2C013301D00_____	5.5	7	7.2	5	FKP2D013301G00_____
4700 "	4.5	6	7.2	5	FKP2C014701D00_____	5.5	7	7.2	5	FKP2D014701G00_____
6800 "	4.5	6	7.2	5	FKP2C016801D00_____	5.5	7	7.2	5	FKP2D016801G00_____
0.01 µF	5.5	7	7.2	5	FKP2C021001G00_____	6.5	8	7.2	5	FKP2D021001I00_____
0.015 "	6.5	8	7.2	5	FKP2C021501I00_____	7.2	8.5	7.2	5	FKP2D021501J00_____
0.022 "	7.2	8.5	7.2	5	FKP2C022201J00_____	8.5	10	7.2	5	FKP2D022201L00_____
0.033 "	8.5	10	7.2	5	FKP2C023301L00_____					


Capacitance	250 VDC/160 VAC*					400 VDC/220 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	4.5	6	7.2	5	FKP2F001001D00_____	4.5	6	7.2	5	FKP2G001001D00_____
150 "	4.5	6	7.2	5	FKP2F001501D00_____	4.5	6	7.2	5	FKP2G001501D00_____
220 "	4.5	6	7.2	5	FKP2F002201D00_____	4.5	6	7.2	5	FKP2G002201D00_____
330 "	4.5	6	7.2	5	FKP2F003301D00_____	4.5	6	7.2	5	FKP2G003301D00_____
470 "	4.5	6	7.2	5	FKP2F004701D00_____	4.5	6	7.2	5	FKP2G004701D00_____
680 "	4.5	6	7.2	5	FKP2F006801D00_____	4.5	6	7.2	5	FKP2G006801D00_____
1000 pF	4.5	6	7.2	5	FKP2F011001D00_____	4.5	6	7.2	5	FKP2G011001D00_____
1500 "	4.5	6	7.2	5	FKP2F011501D00_____	4.5	6	7.2	5	FKP2G011501D00_____
2200 "	4.5	6	7.2	5	FKP2F012201D00_____	4.5	6	7.2	5	FKP2G012201D00_____
3300 "	5.5	7	7.2	5	FKP2F013301G00_____	5.5	7	7.2	5	FKP2G013301G00_____
4700 "	6.5	8	7.2	5	FKP2F014701I00_____	6.5	8	7.2	5	FKP2G014701I00_____
6800 "	6.5	8	7.2	5	FKP2F016801I00_____	7.2	8.5	7.2	5	FKP2G016801J00_____
0.01 µF	7.2	8.5	7.2	5	FKP2F021001J00_____	8.5	10	7.2	5	FKP2G021001L00_____
0.015 "	8.5	10	7.2	5	FKP2F021501L00_____					

\* AC voltage:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$


\*\* PCM = Printed circuit module = pin spacing.

E12 values and individual values available from 27 pF up on request.

Dims. in mm.

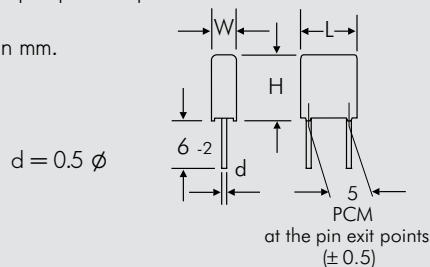

Part number completion:	
Tolerance:	10 % = K
	5 % = J
	2.5 % = H
	2 % = G
	1.5 % = F
	1 % = E
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 144.	

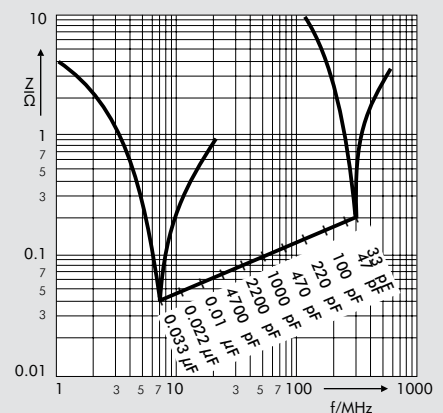

Impedance change with frequency (general guide).

Rights reserved to amend design data without prior notification.

Continuation page 32



## Continuation

### General Data

Capacitance	630 VDC/250 VAC*					800 VDC/250 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	4.5	6	7.2	5	FKP2J001001D00_	4.5	6	7.2	5	FKP2L001001D00_
150 "	4.5	6	7.2	5	FKP2J001501D00_	4.5	6	7.2	5	FKP2L001501D00_
220 "	4.5	6	7.2	5	FKP2J002201D00_	4.5	6	7.2	5	FKP2L002201D00_
330 "	4.5	6	7.2	5	FKP2J003301D00_	4.5	6	7.2	5	FKP2L003301D00_
470 "	4.5	6	7.2	5	FKP2J004701D00_	5.5	7	7.2	5	FKP2L004701G00_
680 "	4.5	6	7.2	5	FKP2J006801D00_	5.5	7	7.2	5	FKP2L006801G00_
1000 pF	4.5	6	7.2	5	FKP2J011001D00_	5.5	7	7.2	5	FKP2L011001G00_
1500 "	4.5	6	7.2	5	FKP2J011501D00_	5.5	7	7.2	5	FKP2L011501G00_
2200 "	5.5	7	7.2	5	FKP2J012201G00_	6.5	8	7.2	5	FKP2L012201I00_
3300 "	6.5	8	7.2	5	FKP2J013301I00_	7.2	8.5	7.2	5	FKP2L013301J00_
4700 "	6.5	8	7.2	5	FKP2J014701I00_	8.5	10	7.2	5	FKP2L014701L00_
6800 "	7.2	8.5	7.2	5	FKP2J016801J00_					
0.01 µF	8.5	10	7.2	5	FKP2J021001L00_					

Capacitance	1000 VDC/250 VAC*				
	W	H	L	PCM**	Part number
33 pF	4.5	6	7.2	5	FKP2O100331D00_
47 "	4.5	6	7.2	5	FKP2O100471D00_
68 "	4.5	6	7.2	5	FKP2O100681D00_
100 pF	4.5	6	7.2	5	FKP2O101001D00_
150 "	4.5	6	7.2	5	FKP2O101501D00_
220 "	4.5	6	7.2	5	FKP2O102201D00_
330 "	4.5	6	7.2	5	FKP2O103301D00_
470 "	5.5	7	7.2	5	FKP2O104701G00_
680 "	5.5	7	7.2	5	FKP2O106801G00_
1000 pF	6.5	8	7.2	5	FKP2O111001I00_
1500 "	7.2	8.5	7.2	5	FKP2O111501J00_
2200 "	8.5	10	7.2	5	FKP2O112201L00_

E12 values and individual values available from 27 pF up on request.

Dims. in mm.


Part number completion:	
Tolerance:	10 % = K
	5 % = J
	2.5 % = H
	2 % = G
	1.5 % = F
	1 % = E
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 144.	

\* AC voltage:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing.

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

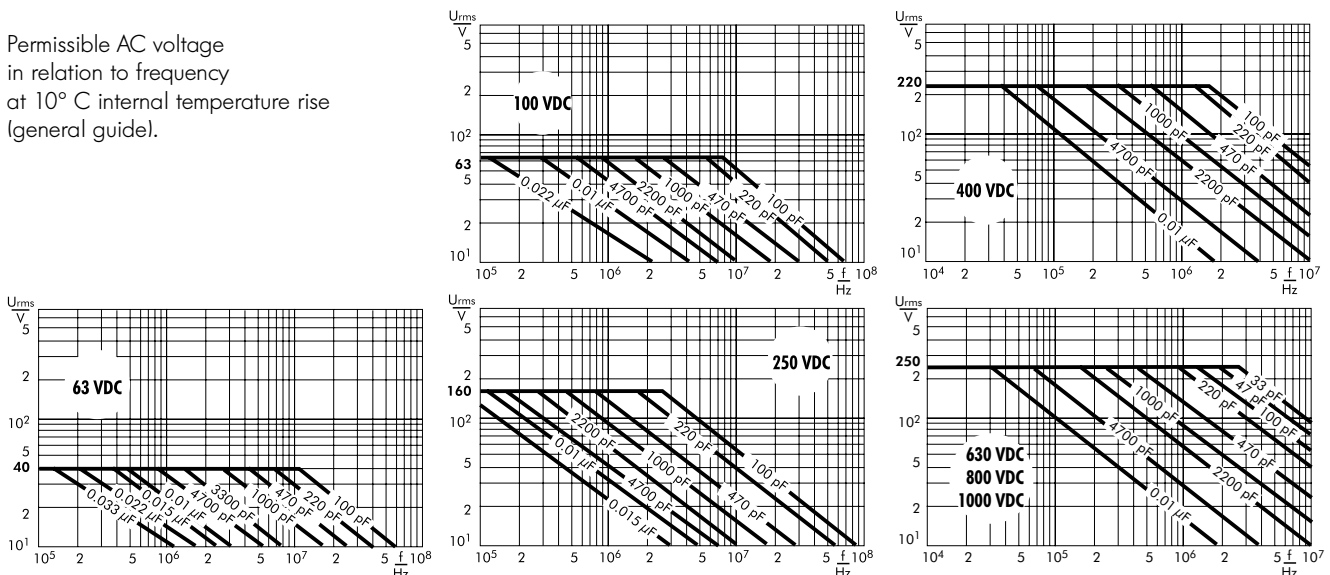

## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating:  $T_{max.} \leq 125^{\circ}C$   
soldering:  $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating:  $T_{max.} \leq 100^{\circ}C$   
soldering:  $T_{max.} \leq 110^{\circ}C$


#### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
Dwell time:  $t < 5 \text{ sec}$

#### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
Dwell time:  $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

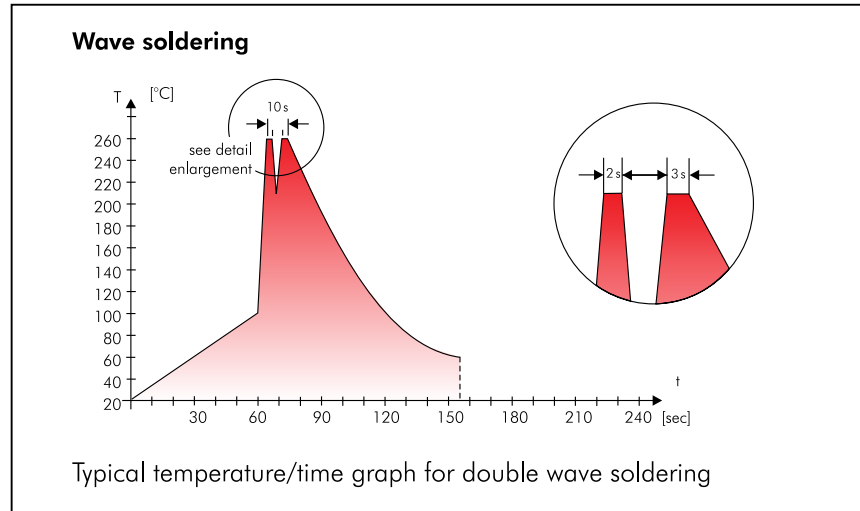

## WIMA Quality and Environmental Philosophy

### ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- AQL check

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

# Typical Dimensions for Taping Configuration

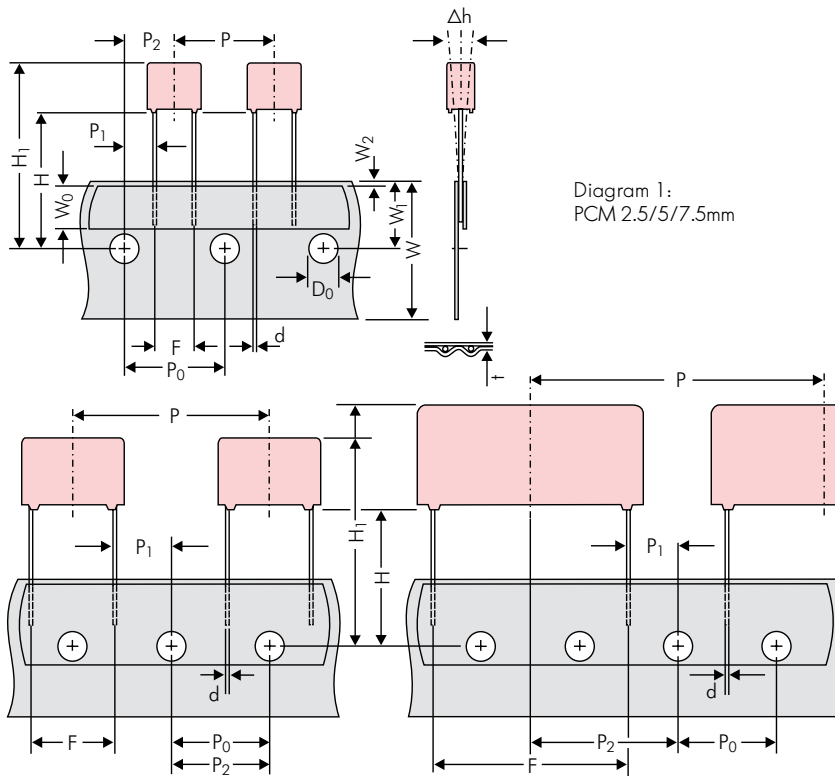


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5\*mm

\*PCM 27.5 tapping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping									
		PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping			
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5			
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape			
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5			
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.			
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2			
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5			
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch			
Feed hole centre to pin	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7			
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3			
Feed hole centre to bottom edge of the component	H	16.5 ±0.3	16.5 ±0.3	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5			
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0			
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.8</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8			
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>			
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.			
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2			
Package (see also page 145)	ROLL/AMMO			AMMO							
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2	depending on comp. dimensions		REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1	B 60 ±2 68 ±2
Unit	see details page 146.										

Dims in mm.

\* Diameter of pins see General Data.


\* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P<sub>0</sub> = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

## Types of Tape Packaging of Capacitors for Automatic Radial Insertion


### ■ ROLL Packaging

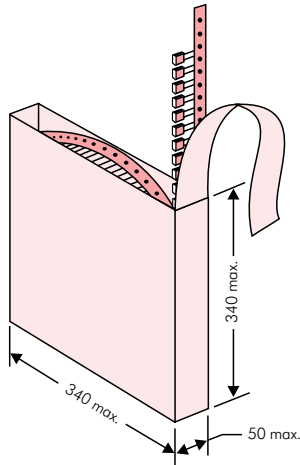

### ■ AMMO Packaging

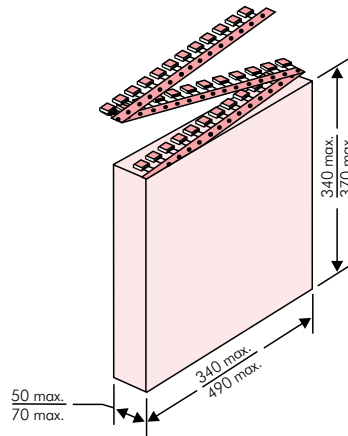

### ■ REEL Packaging

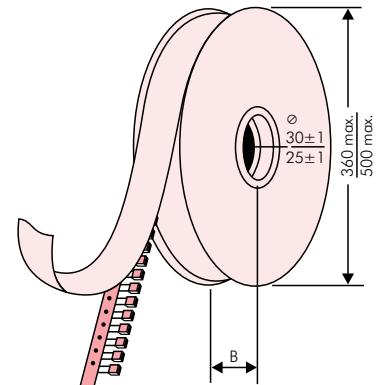

## BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

<b>WIMA</b> Best Capacitors Made in Germany		Werk Unna	
Supplier-ID: 123456789	<b>RoHS</b> 2011/65/EC	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K88D		
Handling Unit: <b>MKS 2</b>	<b>QTY: 5.000</b>	<b>COO: DE</b>	
	<b>MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RMS</b>		
<b>1000067326</b>	Standard 10% Loss - Standard	Drahte 6-2	Week 03/2011
	Vorlage Debitor Inland		

BARCODE „Code 39“



## Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370		
					N	O	F	I	H	J	A	C	B	D
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	5000		2200	2500			2800			
	3	7.5	4.6	<b>0C</b>	5000		2000	2300			2300			
	3.8	8.5	4.6	<b>0D</b>	5000		1500	1800			1800			
	4.6	9	4.6	<b>0E</b>	5000		1200	1500			1500			
	5.5	10	4.6	<b>0F</b>	5000		900	1200			1200			
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	5000		2200	2500			2800			
	3	7.5	7.2	<b>1B</b>	5000		2000	2300			2300			
	3.5	8.5	7.2	<b>1C</b>	5000		1600	2000			2000			
	4.5	6	7.2	<b>1D</b>	6000		1300	1500			1500			
	4.5	9.5	7.2	<b>1E</b>	4000		1300	1500			1500			
	5	10	7.2	<b>1F</b>	3500		1100	1400			1400			
	5.5	7	7.2	<b>1G</b>	4000		1000	1200			1200			
	5.5	11.5	7.2	<b>1H</b>	2500		1000	1200			1200			
	6.5	8	7.2	<b>1I</b>	2500		800	1000			1000			
	7.2	8.5	7.2	<b>1J</b>	2500		700	1000			1000			
	7.2	13	7.2	<b>1K</b>	2000		700	950			1000			
	8.5	10	7.2	<b>1L</b>	2000		600	800			800			
	8.5	14	7.2	<b>1M</b>	1500		600	800			800			
11	16	7.2	<b>1N</b>	1000		500	600			400				
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>	5000			2500	4400		2500			
	3	8.5	10	<b>2B</b>	5000			2200	4300		2300		4150	
	4	9	10	<b>2C</b>	4000			1700	3200		1700		3100	
	4.5	9.5	10.3	<b>2D</b>	3500			1500	2900		1400		2800	
	5	10.5	10.3	<b>2E</b>	3000			1300	2500		1300			
	5.7	12.5	10.3	<b>2F</b>	2000			1000	2200		1100			
	7.2	12.5	10.3	<b>2G</b>	1500			900	1800		1000			
<b>10 mm</b>	3	9	13	<b>3A</b>	3000			1100	2200				1900	
	4	8.5	13.5	<b>FA</b>	3000			900	1600				1450	
	4	9	13	<b>3C</b>	3000			900	1600				1450	
	4	9.5	13	<b>3D</b>	3000			900	1600				1400	
	5	10	13.5	<b>FB</b>	2000			700	1300				1200	
	5	11	13	<b>3F</b>	3000			700	1300				1200	
	6	12	13	<b>3G</b>	2400			550	1100				1000	
	6	12.5	13	<b>3H</b>	2400			550	1100				1000	
8	12	13	<b>3I</b>	2000			400	800				740		
<b>15 mm</b>	5	11	18	<b>4B</b>	2400			600	1200				1150	
	5	13	19	<b>FC</b>	1000			600	1200				1200	
	6	12.5	18	<b>4C</b>	2000			500	1000				1000	
	6	14	19	<b>FD</b>	1000			500	1000				1000	
	7	14	18	<b>4D</b>	1600			450	900				850	
	7	15	19	<b>FE</b>	1000			450	900				850	
	8	15	18	<b>4F</b>	1200			400	800				740	
	8	17	19	<b>FF</b>	500			400	800				740	
	9	14	18	<b>4H</b>	1200			350	700				650	
	9	16	18	<b>4J</b>	900			350	700				650	
	10	18	19	<b>FG</b>	500			300	650				590	
11	14	18	<b>4M</b>	1000			300	600				540		
<b>22.5 mm</b>	5	14	26.5	<b>5A</b>	1200				800				770	
	6	15	26.5	<b>5B</b>	1000				700				640	
	7	16.5	26.5	<b>5D</b>	760				600				550	
	8	20	28	<b>FH</b>	500				500				480	
	8.5	18.5	26.5	<b>5F</b>	500				480				450	
	10	22	28	<b>FI</b>	540*				420				380	
	10.5	19	26.5	<b>5G</b>	680*				400				360	
	10.5	20.5	26.5	<b>5H</b>	680*				400				360	
	11	21	26.5	<b>5I</b>	680*				380				350	
	12	24	28	<b>FJ</b>	450*				350				310	

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



## Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit										
						ROLL		REEL				AMMO				
	W	H	L	Codes		S	N	O	ø 360		ø 500		340 × 340		490 × 370	
							H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
							F	I	H	J	A	C	B	D		
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>	640*	–	–	–	–	460/340*	–	–	–	420		
	11	21	31.5	<b>6B</b>	544*	–	–	–	–	380/280*	–	–	–	350		
	13	24	31.5	<b>6D</b>	448*	–	–	–	–	300	–	–	–	290		
	13	25	33	<b>6K</b>	336*	–	–	–	–	–	–	–	–	–		
	15	26	31.5	<b>6F</b>	384*	–	–	–	–	270	–	–	–	250		
	15	26	33	<b>6L</b>	288*	–	–	–	–	–	–	–	–	–		
	17	29	31.5	<b>6G</b>	176*	–	–	–	–	–	–	–	–	–		
	17	34.5	31.5	<b>6I</b>	176*	–	–	–	–	–	–	–	–	–		
	20	32	33	<b>6M</b>	216*	–	–	–	–	–	–	–	–	–		
	20	39.5	31.5	<b>6J</b>	144*	–	–	–	–	–	–	–	–	–		
<b>37.5 mm</b>	9	19	41.5	<b>7A</b>	480*	–	–	–	–	–	–	–	–	–		
	11	22	41.5	<b>7B</b>	408*	–	–	–	–	–	–	–	–	–		
	13	24	41.5	<b>7C</b>	252*	–	–	–	–	–	–	–	–	–		
	15	26	41.5	<b>7D</b>	144*	–	–	–	–	–	–	–	–	–		
	17	29	41.5	<b>7E</b>	132*	–	–	–	–	–	–	–	–	–		
	19	32	41.5	<b>7F</b>	108*	–	–	–	–	–	–	–	–	–		
	20	39.5	41.5	<b>7G</b>	108*	–	–	–	–	–	–	–	–	–		
	24	45.5	41.5	<b>7H</b>	84*	–	–	–	–	–	–	–	–	–		
	31	46	41.5	<b>7I</b>	72*	–	–	–	–	–	–	–	–	–		
	35	50	41.5	<b>7J</b>	35*	–	–	–	–	–	–	–	–	–		
40	55	41.5	<b>7K</b>	28*	–	–	–	–	–	–	–	–	–			
<b>48.5 mm</b>	19	31	56	<b>8D</b>	50*	–	–	–	–	–	–	–	–	–		
	23	34	56	<b>8E</b>	72*	–	–	–	–	–	–	–	–	–		
	27	37.5	56	<b>8H</b>	60*	–	–	–	–	–	–	–	–	–		
	33	48	56	<b>8J</b>	48*	–	–	–	–	–	–	–	–	–		
	37	54	56	<b>8L</b>	25*	–	–	–	–	–	–	–	–	–		
<b>52.5 mm</b>	35	50	57	<b>9F</b>	25*	–	–	–	–	–	–	–	–	–		
	45	55	57	<b>9H</b>	20*	–	–	–	–	–	–	–	–	–		
	45	65	57	<b>9J</b>	20*	–	–	–	–	–	–	–	–	–		

\* for 2-inch transport pitches.

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.



# WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
<b>M</b>	<b>K</b>	<b>S</b>	<b>2</b>	<b>C</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>A</b>	<b>0</b>	<b>0</b>	<b>M</b>	<b>S</b>	<b>S</b>	<b>D</b>
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6-2		

<p><b>Type description:</b></p> <p>SMD-PET = SMDT  SMD-PPS = SMDI  FKP 02 = FKP0  MKS 02 = MKS0  FKS 2 = FKS2  FKP 2 = FKP2  MKS 2 = MKS2  MKP 2 = MKP2  FKS 3 = FKS3  FKP 3 = FKP3  MKS 4 = MKS4  MKP 4 = MKP4  MKP 10 = MKP1  FKP 4 = FKP4  FKP 1 = FKP1  MKP-X2 = MKX2  MKP-X2 R = MKXR  MKP-Y2 = MKY2  MP 3-X2 = MPX2  MP 3-X1 = MPX1  MP 3-Y2 = MPY2  MP 3R-Y2 = MPRY  Snubber MKP = SNMP  Snubber FKP = SNFP  GTO MKP = GTOM  DC-LINK MKP 3 = DCP3  DC-LINK MKP 4 = DCP4  DC-LINK MKP 4S = DCPS  DC-LINK MKP 5 = DCP5  DC-LINK MKP 6 = DCP6  DC-LINK HC = DCH_  DC-LINK HY = DCHY  SuperCap S = SCSS  SuperCap H = SCSH  SuperCap M = SCM_</p>	<p><b>Rated voltage:</b></p> <p>2.7 VDC = A1  12 VDC = AN  16 VDC = A0  32 VDC = AH  48 VDC = AQ  50 VDC = B0  56 VDC = B1  63 VDC = C0  64 VDC = CA  100 VDC = D0  125 VDC = DA  250 VDC = F0  400 VDC = G0  450 VDC = H0  600 VDC = I0  630 VDC = J0  700 VDC = K0  800 VDC = L0  850 VDC = M0  900 VDC = N0  1000 VDC = O1  1100 VDC = P0  1200 VDC = Q0  1250 VDC = R0  1500 VDC = S0  1600 VDC = T0  2000 VDC = U0  2500 VDC = V0  3000 VDC = W0  4000 VDC = X0  6000 VDC = Y0  250 VAC = 0W  275 VAC = 1W  300 VAC = 2W  400 VAC = 3W  440 VAC = 4W  500 VAC = 5W</p>	<p><b>Capacitance:</b></p> <p>22 pF = 0022  47 pF = 0047  100 pF = 0100  150 pF = 0150  220 pF = 0220  330 pF = 0330  470 pF = 0470  680 pF = 0680  1000 pF = 1100  1500 pF = 1150  2200 pF = 1220  3300 pF = 1330  4700 pF = 1470  6800 pF = 1680  0.01 µF = 2100  0.022 µF = 2220  0.047 µF = 2470  0.1 µF = 3100  0.22 µF = 3220  0.47 µF = 3470  1 µF = 4100  2.2 µF = 4220  4.7 µF = 4470  10 µF = 5100  22 µF = 5220  47 µF = 5470  100 µF = 6100  220 µF = 6220  1 F = A010  2.5 F = A025  50 F = A500  100 F = B100  125 F = B125  500 F = B500  1200 F = C120  ...</p>	<p><b>Size:</b></p> <p>4.8x3.3x3 Size 1812 = KA  4.8x3.3x4 Size 1812 = KB  5.7x5.1x3.5 Size 2220 = QA  5.7x5.1x4.5 Size 2220 = QB  7.2x6.1x3 Size 2824 = TA  7.2x6.1x5 Size 2824 = TB  10.2x7.6x5 Size 4030 = VA  12.7x10.2x6 Size 5040 = XA  15.3x13.7x7 Size 6054 = YA  2.5x7x4.6 PCM 2.5 = 0B  3x7.5x4.6 PCM 2.5 = 0C  2.5x6.5x7.2 PCM 5 = 1A  3x7.5x7.2 PCM 5 = 1B  2.5x7x10 PCM 7.5 = 2A  3x8.5x10 PCM 7.5 = 2B  3x9x13 PCM 10 = 3A  4x9x13 PCM 10 = 3C  5x11x18 PCM 15 = 4B  6x12.5x18 PCM 15 = 4C  5x14x26.5 PCM 22.5 = 5A  6x15x26.5 PCM 22.5 = 5B  9x19x31.5 PCM 27.5 = 6A  11x21x31.5 PCM 27.5 = 6B  9x19x41.5 PCM 37.5 = 7A  11x22x41.5 PCM 37.5 = 7B  94x49x182 DCH_ = H0  94x77x182 DCH_ = H1  ...</p>	<p><b>Tolerance:</b></p> <p>20% = M  10% = K  5% = J  2.5% = H  1% = E  ...</p> <p><b>Packing:</b></p> <p>AMMO H16.5 340x340 = A  AMMO H16.5 490x370 = B  AMMO H18.5 340x340 = C  AMMO H18.5 490x370 = D  REEL H16.5 360 = F  REEL H16.5 500 = H  REEL H18.5 360 = I  REEL H18.5 500 = J  ROLL H16.5 = N  ROLL H18.5 = O  BLISTER W12 180 = P  BLISTER W12 330 = Q  BLISTER W16 330 = R  BLISTER W24 330 = T  Bulk/TPS Standard = S  ...</p>
			<p><b>Version code:</b></p> <p>Standard = 00  Version A1 = 1A  Version A1.1.1 = 1B  Version A2 = 2A  ...</p>	<p><b>Pin length (untaped)</b></p> <p>3.5 ±0.5 = C9  6-2 = SD  16 ±1 = P1  ...</p>

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

## Polypropylene (PP) Capacitors for High Pulse Applications with Metal Foil Electrodes and Metallized Internal Series Connection in PCM 15 mm to 37.5 mm. Capacitances from 100 pF to 4.7 $\mu$ F. Rated Voltages from 400 VDC to 2000 VDC.

### Special Features

- High pulse duty
- Self-healing
- Internal series connection
- Very low dissipation factor
- Negative capacitance change versus temperature
- Smaller box sizes than FKP 1
- AEC-Q200 qualified
- According to RoHS 2011/65/EU

### Typical Applications

For high pulse and high frequency applications e.g.

- Switch mode power supplies
- Converter in drives and power electronics
- Deflection systems in monitors and TV-sets
- Electronic ballasts

### Construction


#### Dielectric:

Polypropylene (PP) film

#### Capacitor electrodes:

Aluminium foil and single-sided metallized plastic film

#### Internal construction:

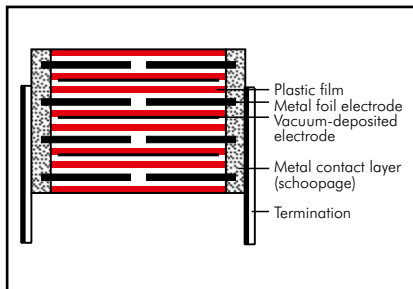

#### Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

#### Terminations:

Tinned wire.

#### Marking:

Colour: Red. Marking: Black.

### Electrical Data

#### Capacitance range:

100 pF to 4.7  $\mu$ F (E12-values on request)

#### Rated voltages:

400 VDC, 630 VDC, 1000 VDC, 1250 VDC, 1600 VDC, 2000 VDC

#### Capacitance tolerances:

$\pm 20\%$ ,  $\pm 10\%$ ,  $\pm 5\%$  (other tolerances are available subject to special enquiry)

#### Operating temperature range:

$-55^{\circ}$  C to  $+105^{\circ}$  C

#### Climatic test category:

55/100/56 in accordance with IEC

#### Insulation resistance at $+20^{\circ}$ C:

$C \leq 0.1 \mu\text{F}$ :  $\geq 1 \times 10^5 \text{ M}\Omega$

$C > 0.1 \mu\text{F}$ :  $\geq 10000 \text{ sec (M}\Omega \times \mu\text{F)}$

Measuring voltage: 100 V/1 min.

#### Dissipation factors at $+20^{\circ}$ C: $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 5 \times 10^{-4}$	$\leq 5 \times 10^{-4}$	$\leq 5 \times 10^{-4}$
10 kHz	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	-
100 kHz	$\leq 10 \times 10^{-4}$	-	-

#### Test voltage: $2 U_r$ , 2 sec.

#### Dielectric absorption:

0.05%

#### Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from  $+85^{\circ}$  C for DC voltages and from  $+75^{\circ}$  C for AC voltages.

#### Reliability:

Operational life  $> 300000$  hours

Failure rate  $< 1$  fit ( $0.5 \times U_r$  and  $40^{\circ}$  C)

#### Maximum pulse rise time:

Capacitance pF/ $\mu$ F	max. pulse rise time V/ $\mu$ sec at $T_A < 40^{\circ}$ C					
	400 VDC	630 VDC	1000 VDC	1250 VDC	1600 VDC	2000 VDC
100 ... 220	-	-	-	-	-	39000
330 ... 680	-	-	-	-	-	39000
1000 ... 2200	-	-	-	-	27000	39000
3300 ... 6800	-	-	-	-	17000	21000
0.01 ... 0.022	7000	11000	11000	11000	11000	11000
0.033 ... 0.068	7000	9000	9000	9000	9000	9000
0.1 ... 0.22	6000	9000	9000	9000	9000	9000
0.33 ... 0.68	3000	5000	5000	5000	5000	5000
1.0 ... 4.7	1000	1600	2000	2000	2000	-

### Mechanical Tests

#### Pull test on pins:

$d \leq 0.8 \phi$ : 10 N in direction of pins

$d > 0.8 \phi$ : 20 N in direction of pins

according to IEC 60068-2-21

#### Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

#### Low air density:

1 kPa = 10 mbar in accordance with

IEC 60068-2-13

#### Bump test:

4000 bumps at  $390 \text{ m/sec}^2$

in accordance with IEC 60068-2-29

### Packing

Available taped and reeled up to and

including case size 15 x 26 x 31.5 /

PCM 27.5 mm.

Detailed taping information and graphs

at the end of the catalogue.

For further details and graphs please

refer to Technical Information.



## Continuation

### General Data

Capacitance	400 VDC/250 VAC*					630 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 µF	5	11	18	15	FKP4G021004B00	5	11	18	15	FKP4J021004B00
0.015 "	5	11	18	15	FKP4G021504B00	6	12.5	18	15	FKP4J021504C00
0.022 "	6	12.5	18	15	FKP4G022204C00	7	14	18	15	FKP4J022204D00
0.033 "	7	14	18	15	FKP4G023304D00	8	15	18	15	FKP4J023304F00
0.047 "	8	15	18	15	FKP4G024704F00	6	15	26.5	22.5	FKP4J023305B00
	6	15	26.5	22.5	FKP4G024705B00	9	16	18	15	FKP4J024704J00
0.068 "	7	16.5	26.5	22.5	FKP4G026805D00	7	16.5	26.5	22.5	FKP4J024705D00
0.1 µF	8.5	18.5	26.5	22.5	FKP4G031005F00	8.5	18.5	26.5	22.5	FKP4J026805F00
	11	21	26.5	22.5	FKP4G031505I00	10.5	19	26.5	22.5	FKP4J031005G00
0.15 "	9	19	31.5	27.5	FKP4G031506A00	11	21	31.5	27.5	FKP4J031006B00
	11	21	31.5	27.5	FKP4G032206B00	11	21	26.5	22.5	FKP4J031505I00
0.22 "	11	21	31.5	27.5	FKP4G032206B00	11	21	31.5	27.5	FKP4J031506B00
0.33 "	13	24	31.5	27.5	FKP4G033306D00	13	24	31.5	27.5	FKP4J032206D00
0.47 "	17	29	31.5	27.5	FKP4G034706G00	15	26	31.5	27.5	FKP4J033306F00
0.68 "	17	34.5	31.5	27.5	FKP4G036806I00	17	34.5	31.5	27.5	FKP4J034706I00
1.0 µF	20	39.5	31.5	27.5	FKP4G041006J00	17	34.5	31.5	27.5	FKP4J036806I00
	20	39.5	41.5	37.5	FKP4G041507G00	19	32	41.5	37.5	FKP4J036807F00
1.5 "	24	45.5	41.5	37.5	FKP4G042207H00	20	39.5	41.5	37.5	FKP4J041007G00
2.2 "	31	46	41.5	37.5	FKP4G043307I00	24	45.5	41.5	37.5	FKP4J041507H00
4.7 "	40	55	41.5	37.5	FKP4G044707K00	31	46	41.5	37.5	FKP4J042207I00
						40	55	41.5	37.5	FKP4J043307K00

Capacitance	1000 VDC/600 VAC*					1250 VDC/600 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 µF	6	12.5	18	15	FKP4O121004C00	9	16	18	15	FKP4R021004J00
0.015 "	5	14	26.5	22.5	FKP4O121005A00	6	15	26.5	22.5	FKP4R021005B00
	7	14	18	15	FKP4O121504D00	7	16.5	26.5	22.5	FKP4R021505D00
0.022 "	6	15	26.5	22.5	FKP4O121505B00	8.5	18.5	26.5	22.5	FKP4R022205F00
	8	15	18	15	FKP4O122204F00					
0.033 "	6	15	26.5	22.5	FKP4O122205B00	10.5	19	26.5	22.5	FKP4R023305G00
	7	16.5	26.5	22.5	FKP4O123305D00					
0.047 "	8.5	18.5	26.5	22.5	FKP4O124705F00	9	19	31.5	27.5	FKP4R023306A00
	9	19	31.5	27.5	FKP4O124706A00	11	21	31.5	27.5	FKP4R024706B00
0.068 "	11	21	26.5	22.5	FKP4O126805I00	13	24	31.5	27.5	FKP4R026806D00
	9	19	31.5	27.5	FKP4O126806A00					
0.1 µF	11	21	31.5	27.5	FKP4O131006B00	15	26	31.5	27.5	FKP4R031006F00
0.15 "	13	24	31.5	27.5	FKP4O131506D00	15	26	31.5	27.5	FKP4R031506F00
0.22 "	15	26	31.5	27.5	FKP4O132206F00	20	39.5	31.5	27.5	FKP4R032206J00
	0.33 "	17	34.5	31.5	27.5	FKP4O133306I00	17	29	41.5	37.5
19		32	41.5	37.5	FKP4O133307F00	19	32	41.5	37.5	FKP4R033307F00
0.47 "	20	39.5	41.5	37.5	FKP4O134707G00	20	39.5	41.5	37.5	FKP4R034707G00
	24	45.5	41.5	37.5	FKP4O136807H00					
1.0 µF	31	46	41.5	37.5	FKP4O141007I00	24	45.5	41.5	37.5	FKP4R036807H00
1.5 "	35	50	41.5	37.5	FKP4O141507J00	31	46	41.5	37.5	FKP4R041007I00
2.2 "	35	50	41.5	37.5	FKP4O142207J00	35	50	41.5	37.5	FKP4R041507J00


\* AC voltage:  $f = 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\* PCM = Printed circuit module  
= pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

ø d	PCM
0.8	15 - 27.5
1.0	37.5



Part number completion:

Tolerance: 20 % = M  
10 % = K  
5 % = J

Packing: bulk = S  
Pin length: 6-2 = SD

Taped version see page 161.

Rights reserved to amend design data without prior notification.

## Continuation

### General Data


Capacitance	1600 VDC/650 VAC*					2000 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF						5	11	18	15	FKP4U001004B00
150 "						5	11	18	15	FKP4U001504B00
220 "						5	11	18	15	FKP4U002204B00
330 "						5	11	18	15	FKP4U003304B00
470 "						5	11	18	15	FKP4U004704B00
680 "						5	11	18	15	FKP4U006804B00
1000 pF	5	11	18	15	FKP4T011004B00	5	11	18	15	FKP4U011004B00
1500 "	5	11	18	15	FKP4T011504B00	6	12.5	18	15	FKP4U011504C00
2200 "	6	12.5	18	15	FKP4T012204C00	7	14	18	15	FKP4U012204D00
3300 "	7	14	18	15	FKP4T013304D00	9	16	18	15	FKP4U013304J00
						6	15	26.5	22.5	FKP4U013305B00
4700 "	8	15	18	15	FKP4T014704F00	7	16.5	26.5	22.5	FKP4U014705D00
6800 "	9	16	18	15	FKP4T016804J00	8.5	18.5	26.5	22.5	FKP4U016805F00
0.01 µF	6	15	26.5	22.5	FKP4T021005B00	10.5	19	26.5	22.5	FKP4U021005G00
0.015 "	8.5	18.5	26.5	22.5	FKP4T021505F00	11	21	26.5	22.5	FKP4U021505I00
						9	19	31.5	27.5	FKP4U021506A00
0.022 "	10.5	19	26.5	22.5	FKP4T022205H00	11	21	31.5	27.5	FKP4U022206B00
	9	19	31.5	27.5	FKP4T022206A00	11	22	41.5	37.5	FKP4U022207B00
0.033 "	11	21	31.5	27.5	FKP4T023306B00	13	24	31.5	27.5	FKP4U023306D00
0.047 "	13	24	31.5	27.5	FKP4T024706D00	15	26	31.5	27.5	FKP4U024706F00
						15	26	41.5	37.5	FKP4U024707D00
0.068 "	15	26	31.5	27.5	FKP4T026806F00	17	34.5	31.5	27.5	FKP4U026806I00
						17	29	41.5	37.5	FKP4U026807E00
0.1 µF	17	34.5	31.5	27.5	FKP4T031006I00	17	29	41.5	37.5	FKP4U031007E00
0.15 "	20	39.5	31.5	27.5	FKP4T031506J00	20	39.5	41.5	37.5	FKP4U031507G00
	19	32	41.5	37.5	FKP4T031507F00					
0.22 "	20	39.5	41.5	37.5	FKP4T032207G00	24	45.5	41.5	37.5	FKP4U032207H00
0.33 "	24	45.5	41.5	37.5	FKP4T033307H00	31	46	41.5	37.5	FKP4U033307I00
0.47 "	31	46	41.5	37.5	FKP4T034707I00	31	46	41.5	37.5	FKP4U034707I00
0.68 "	35	50	41.5	37.5	FKP4T036807J00	35	50	41.5	37.5	FKP4U036807J00
1.0 µF	40	55	41.5	37.5	FKP4T041007K00					

\* AC voltage:  $f = 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Dims. in mm.

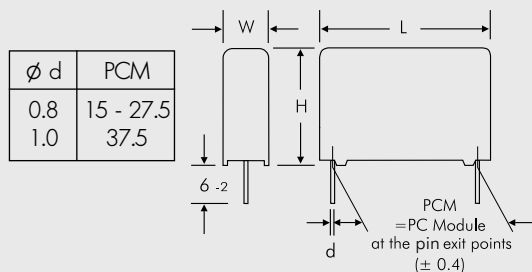







Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 161.	

Rights reserved to amend design data without prior notification.

Continuation page 78

## Continuation

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

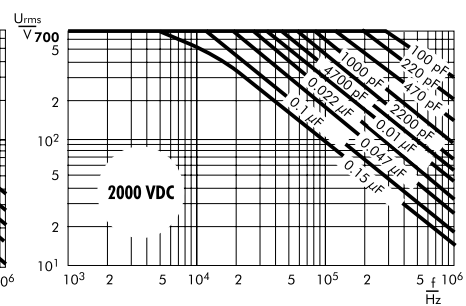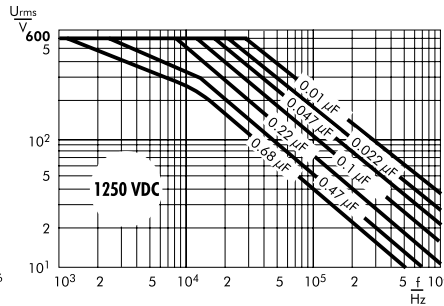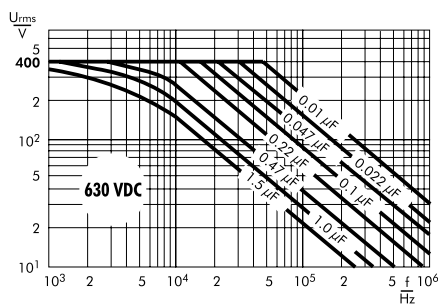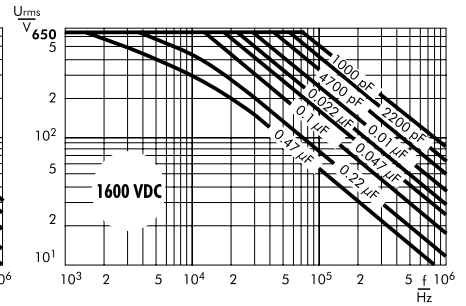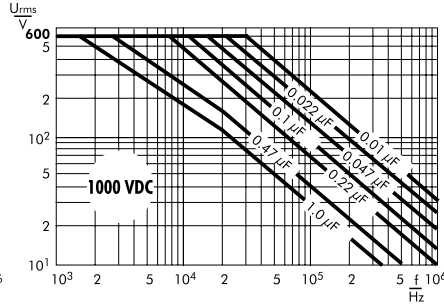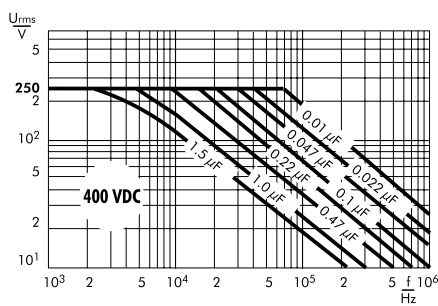

## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating:  $T_{max.} \leq 125^{\circ}C$   
 soldering:  $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating:  $T_{max.} \leq 100^{\circ}C$   
 soldering:  $T_{max.} \leq 110^{\circ}C$


### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
 Dwell time:  $t < 5 \text{ sec}$

### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
 Dwell time:  $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

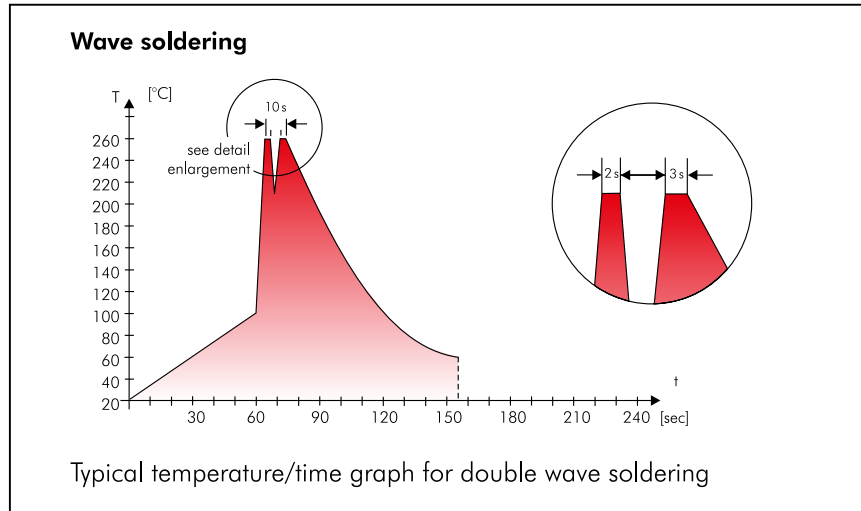

## WIMA Quality and Environmental Philosophy

### ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

# Typical Dimensions for Taping Configuration

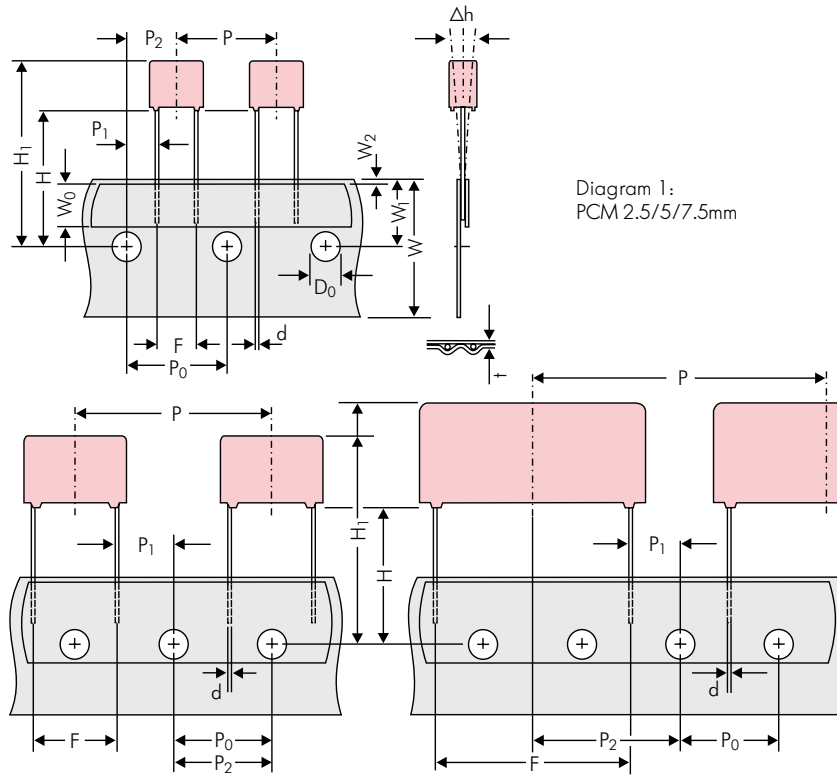


Diagram 1:  
PCM 2.5/5/7.5mm

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5\*mm

\*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping							
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping	
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5	
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	
Feed hole centre to pin	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7	
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3	
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0	
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.8</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8	
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	
Package (see also page 162)	ROLL/AMMO				AMMO				
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions	REEL φ 360 max. φ 30 ±1				B 52 ±2 58 ±2 or 66 ±2 } depending on PCM and component dimensions	REEL φ 500 max. φ 25 ±1
Unit	see details page 163.								

Dims in mm.

\* Diameter of pins see General Data.


\* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P<sub>0</sub> = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

## Types of Tape Packaging of Capacitors for Automatic Radial Insertion


### ■ ROLL Packaging

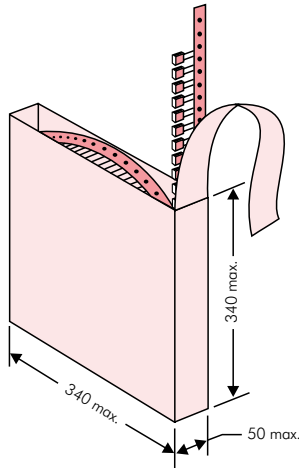

### ■ AMMO Packaging

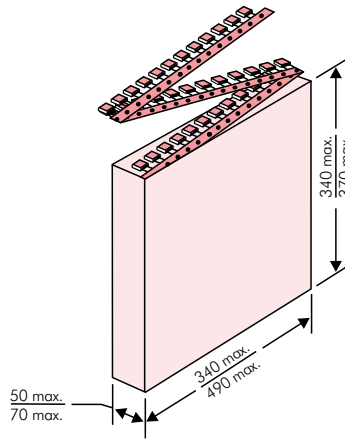

### ■ REEL Packaging

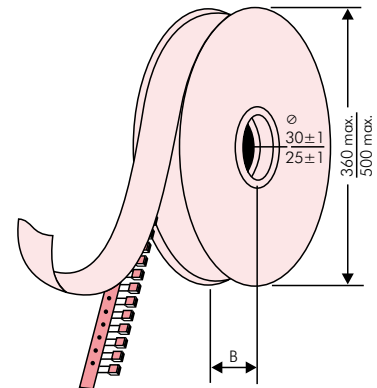

## BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- technical note
- capacitance tolerance
- packing
- connecting information

**WIMA** Best Capacitors Made in Germany  
Werk Aurich

Supplier - ID: LIEF.NR.	Date Code: 20210419
Purchase Order No. (P/O): Bestellung xyz	P/O line: 100
Customer Part No.: KUNDENTEILENUMMER	
WIMA Part No.: MKP1F041006B00KSSD	Quantity: 459
WIMA Confirmation No.: 0001105072000100	RoHS 2011/65/EU
	COO: DE
Customer No.: 0000100002	
Gross Weight [g]: 4557	
<b>WIMA - MKP 10</b>	WIMA Part No.: MKP1F041006B00KSSD
MKP 10 1.0 $\mu$ F 250 VDC 11x21x31.5 RM27.5	
Standard 10% Lose - Standard Drähte 6-2	
Vorlage Debitor Inland	
	0001105072000100
1002021443	QTY: 459 Week 19/2021

BARCODE PDF417  
BARCODE 2D Datamatrix

# Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	pcs. per packing unit								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 x 340	490 x 370		
					N	O	F	I	H	J	A	C	B	D
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	5000		2200		2500			2800		
	3	7.5	4.6	<b>0C</b>	5000		2000		2300			2300		
	3.8	8.5	4.6	<b>0D</b>	5000		1500		1800			1800		
	4.6	9	4.6	<b>0E</b>	5000		1200		1500			1500		
	5.5	10	4.6	<b>0F</b>	5000		900		1200			1200		
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	5000		2200		2500			2800		
	3	7.5	7.2	<b>1B</b>	5000		2000		2300			2300		
	3.5	8.5	7.2	<b>1C</b>	5000		1600		2000			2000		
	4.5	6	7.2	<b>1D</b>	6000		1300		1500			1500		
	4.5	9.5	7.2	<b>1E</b>	4000		1300		1500			1500		
	5	10	7.2	<b>1F</b>	3500		1100		1400			1400		
	5.5	7	7.2	<b>1G</b>	4000		1000		1200			1200		
	5.5	11.5	7.2	<b>1H</b>	2500		1000		1200			1200		
	6.5	8	7.2	<b>1I</b>	2500		800		1000			1000		
	7.2	8.5	7.2	<b>1J</b>	2500		700		1000			1000		
	7.2	13	7.2	<b>1K</b>	2000		700		950			1000		
8.5	10	7.2	<b>1L</b>	2000		600		800			800			
8.5	14	7.2	<b>1M</b>	1500		600		800			800			
11	16	7.2	<b>1N</b>	1000		500		600			640			
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>	5000				2500		4400	2500		
	3	8.5	10	<b>2B</b>	5000				2200		4300	2300		4150
	4	9	10	<b>2C</b>	4000				1700		3200	1700		3000
	4.5	9.5	10.3	<b>2D</b>	3500				1500		2900	1400		2700
	5	10.5	10.3	<b>2E</b>	3000				1300		2500	1300		
	5.7	12.5	10.3	<b>2F</b>	2000				1000		2200	1100		
	7.2	12.5	10.3	<b>2G</b>	1500				900		1800	1000		
<b>10 mm</b>	3	9	13	<b>3A</b>	3000				1100		2200			1900
	4	8.5	13.5	<b>FA</b>	3000				900		1600			1450
	4	9	13	<b>3C</b>	3000				900		1600			1450
	4	9.5	13	<b>3D</b>	3000				900		1600			1400
	5	10	13.5	<b>FB</b>	2000				700		1300			1200
	5	11	13	<b>3F</b>	3000				700		1300			1100
	6	12	13	<b>3G</b>	2400				550		1100			1000
	6	12.5	13	<b>3H</b>	2400				550		1100			1000
8	12	13	<b>3I</b>	2000				400		800			740	
<b>15 mm</b>	5	11	18	<b>4B</b>	2400				600		1200			1150
	5	13	19	<b>FC</b>	1000				600		1200			1200
	6	12.5	18	<b>4C</b>	2000				500		1000			1000
	6	14	19	<b>FD</b>	1000				500		1000			1000
	7	14	18	<b>4D</b>	1600				450		900			850
	7	15	19	<b>FE</b>	1000				450		900			850
	8	15	18	<b>4F</b>	1200				400		800			740
	8	17	19	<b>FF</b>	500				400		800			740
	9	14	18	<b>4H</b>	1200				350		700			650
	9	16	18	<b>4J</b>	900				350		700			650
10	18	19	<b>FG</b>	500				300		650			590	
11	14	18	<b>4M</b>	1000				300		600			540	
<b>22.5 mm</b>	5	14	26.5	<b>5A</b>	1200						800			770
	6	15	26.5	<b>5B</b>	1000						700			640
	7	16.5	26.5	<b>5D</b>	760						600			550
	8	20	28	<b>FH</b>	500						500			480
	8.5	18.5	26.5	<b>5F</b>	500						480			450
	10	22	28	<b>FI</b>	570*						420			380
	10.5	19	26.5	<b>5G</b>	594*						400			360
	10.5	20.5	26.5	<b>5H</b>	594*						400			360
	11	21	26.5	<b>5I</b>	561*						380			350
	12	24	28	<b>FJ</b>	480*						350			310

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



## Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit												
						ROLL		REEL				AMMO						
	W	H	L	Codes		S	N	O	ø 360		ø 500		340 x 340		490 x 370			
								H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	
								F	I	H	J	A	C	B	D			
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>	567*	-	-	-	-	460/340*		-	-	-	-	-	-	
	11	21	31.5	<b>6B</b>	459*	-	-	-	-	380/280*		-	-	-	-	-	-	
	13	24	31.5	<b>6D</b>	378*	-	-	-	-	300		-	-	-	-	-	-	
	13	25	33	<b>FK</b>	405*	-	-	-	-	-	-	-	-	-	-	-	-	
	15	26	31.5	<b>6F</b>	324*	-	-	-	-	270		-	-	-	-	-	-	
	15	26	33	<b>FL</b>	324*	-	-	-	-	-	-	-	-	-	-	-	-	
	17	29	31.5	<b>6G</b>	198*	-	-	-	-	-	-	-	-	-	-	-	-	
	17	34.5	31.5	<b>6I</b>	198*	-	-	-	-	-	-	-	-	-	-	-	-	
	20	32	33	<b>FM</b>	162*	-	-	-	-	-	-	-	-	-	-	-	-	-
	20	39.5	31.5	<b>6J</b>	162*	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>37.5 mm</b>	9	19	41.5	<b>7A</b>	441*	-	-	-	-	-	-	-	-	-	-	-	-	
	11	22	41.5	<b>7B</b>	357*	-	-	-	-	-	-	-	-	-	-	-	-	
	13	24	41.5	<b>7C</b>	294*	-	-	-	-	-	-	-	-	-	-	-	-	
	15	26	41.5	<b>7D</b>	252*	-	-	-	-	-	-	-	-	-	-	-	-	-
	17	29	41.5	<b>7E</b>	154*	-	-	-	-	-	-	-	-	-	-	-	-	-
	19	32	41.5	<b>7F</b>	140*	-	-	-	-	-	-	-	-	-	-	-	-	-
	20	39.5	41.5	<b>7G</b>	126*	-	-	-	-	-	-	-	-	-	-	-	-	-
	24	45.5	41.5	<b>7H</b>	112*	-	-	-	-	-	-	-	-	-	-	-	-	-
	28	38	41.5	<b>7L</b>	84*	-	-	-	-	-	-	-	-	-	-	-	-	-
	31	46	41.5	<b>7I</b>	84*	-	-	-	-	-	-	-	-	-	-	-	-	-
	35	50	41.5	<b>7J</b>	35*	-	-	-	-	-	-	-	-	-	-	-	-	-
	40	55	41.5	<b>7K</b>	28*	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>48.5 mm</b>	19	31	56	<b>8D</b>	120*	-	-	-	-	-	-	-	-	-	-	-	-	
	23	34	56	<b>8E</b>	80*	-	-	-	-	-	-	-	-	-	-	-	-	
	27	37.5	56	<b>8H</b>	84*	-	-	-	-	-	-	-	-	-	-	-	-	
	33	48	56	<b>8J</b>	25*	-	-	-	-	-	-	-	-	-	-	-	-	-
	37	54	56	<b>8L</b>	25*	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>52.5 mm</b>	25	45	57	<b>9D</b>	70*	-	-	-	-	-	-	-	-	-	-	-	-	
	30	45	57	<b>9E</b>	60*	-	-	-	-	-	-	-	-	-	-	-	-	
	35	50	57	<b>9F</b>	25*	-	-	-	-	-	-	-	-	-	-	-	-	
	45	55	57	<b>9H</b>	20*	-	-	-	-	-	-	-	-	-	-	-	-	-
	45	65	57	<b>9J</b>	20*	-	-	-	-	-	-	-	-	-	-	-	-	-

\* for 2-inch transport pitches.

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.

Updated data on [www.wima.com](http://www.wima.com)





A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
<b>M</b>	<b>K</b>	<b>S</b>	<b>2</b>	<b>C</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>A</b>	<b>0</b>	<b>0</b>	<b>M</b>	<b>S</b>	<b>S</b>	<b>D</b>
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6 -2		

<p><b>Type description:</b></p> <p>SMD-PET = SMDT                  SMD-PEN = SMDN                  SMD-PPS = SMDI                  FKP 02 = FKPO                  MKS 02 = MKS0                  FKS 2 = FKS2                  FKP 2 = FKP2                  FKS 3 = FKS3                  FKP 3 = FKP 3                  MKS 2 = MKS2                  MKP 2 = MKP2                  MKS 4 = MKS4                  MKP 4 = MKP4                  MKP 10 = MKP1                  FKP 4 = FKP4                  FKP 1 = FKP1                  MKP-X2 = MKX2                  MKP-X1 R = MKX1                  MKP-Y2 = MKY2                  MP 3-X2 = MPX2                  MP 3-X1 = MPX1                  MP 3-Y2 = MPY2                  MP 3R-Y2 = MPRY                  MKP 4F = MKPF                  Snubber MKP = SNMP                  Snubber FKP = SNFP                  GTO MKP = GTOM                  DC-LINK MKP 4 = DCP4                  DC-LINK MKP 6 = DCP6                  DC-LINK HC = DCHC</p>	<p><b>Rated voltage:</b></p> <p>50 VDC = B0                  63 VDC = C0                  100 VDC = D0                  250 VDC = F0                  400 VDC = G0                  450 VDC = H0                  520 VDC = H2                  600 VDC = I0                  630 VDC = J0                  700 VDC = K0                  800 VDC = L0                  850 VDC = M0                  900 VDC = N0                  1000 VDC = O1                  1100 VDC = P0                  1200 VDC = Q0                  1250 VDC = R0                  1500 VDC = S0                  1600 VDC = T0                  1700 VDC = TA                  2000 VDC = U0                  2500 VDC = V0                  3000 VDC = W0                  4000 VDC = X0                  6000 VDC = Y0                  250 VAC = 0W                  275 VAC = 1W                  300 VAC = 2W                  305 VAC = AW                  350 VAC = BW                  440 VAC = 4W                  500 VAC = 5W                  ...</p>	<p><b>Capacitance:</b></p> <p>22 pF = 0022                  47 pF = 0047                  100 pF = 0100                  150 pF = 0150                  220 pF = 0220                  330 pF = 0330                  470 pF = 0470                  680 pF = 0680                  1000 pF = 1100                  1500 pF = 1150                  2200 pF = 1220                  3300 pF = 1330                  4700 pF = 1470                  6800 pF = 1680                  0.01 µF = 2100                  0.022 µF = 2220                  0.047 µF = 2470                  0.1 µF = 3100                  0.22 µF = 3220                  0.47 µF = 3470                  1 µF = 4100                  2.2 µF = 4220                  4.7 µF = 4470                  10 µF = 5100                  22 µF = 5220                  47 µF = 5470                  100 µF = 6100                  220 µF = 6220                  1000 µF = 7100                  1500 µF = 7150                  ...</p>	<p><b>Size:</b></p> <p>4.8x3.3x3 Size 1812 = KA                  4.8x3.3x4 Size 1812 = KB                  5.7x5.1x3.5 Size 2220 = QA                  5.7x5.1x4.5 Size 2220 = QB                  7.2x6.1x3 Size 2824 = TA                  7.2x6.1x5 Size 2824 = TB                  10.2x7.6x5 Size 4030 = VA                  12.7x10.2x6 Size 5040 = XA                  15.3x13.7x7 Size 6054 = YA                  2.5x7x4.6 PCM 2.5 = 0B                  3x7.5x4.6 PCM 2.5 = 0C                  2.5x6.5x7.2 PCM 5 = 1A                  3x7.5x7.2 PCM 5 = 1B                  2.5x7x10 PCM 7.5 = 2A                  3x8.5x10 PCM 7.5 = 2B                  3x9x13 PCM 10 = 3A                  4x9x13 PCM 10 = 3C                  5x11x18 PCM 15 = 4B                  6x12.5x18 PCM 15 = 4C                  5x14x26.5 PCM 22.5 = 5A                  6x15x26.5 PCM 22.5 = 5B                  9x19x31.5 PCM 27.5 = 6A                  11x21x31.5 PCM 27.5 = 6B                  9x19x41.5 PCM 37.5 = 7A                  11x22x41.5 PCM 37.5 = 7B                  19x31x56 PCM 48.5 = 8D                  25x45x57 PCM 52.5 = 9D                  ...</p> <p><b>Version code:</b></p> <p>Standard = 00                  Version A1 = 1A                  Version A1.1.1 = 1B                  Version A2 = 2A                  ...</p>	<p><b>Tolerance:</b></p> <p>±20% = M                  ±10% = K                  ±5% = J                  ±2.5% = H                  ±1% = E                  ...</p> <p><b>Packing:</b></p> <p>AMMO H16.5 340x340 = A                  AMMO H16.5 490x370 = B                  AMMO H18.5 340x340 = C                  AMMO H18.5 490x370 = D                  REEL H16.5 360 = F                  REEL H16.5 500 = H                  REEL H18.5 360 = I                  REEL H18.5 500 = J                  ROLL H16.5 = N                  ROLL H18.5 = O                  BLISTER W12 180 = P                  BLISTER W12 330 = Q                  BLISTER W16 330 = R                  BLISTER W24 330 = T                  Bulk/TPS Standard = S                  ...</p> <p><b>Pin length (untaped)</b></p> <p>3.5 ±0.5 = C9                  6 -2 = SD                  16 ±1 = P1                  ...</p> <p><b>Pin length (taped)</b></p> <p>none = 00</p>
---	---	---	--	---

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.